

Protective hand- and footwear
Product catalogue 2020/21




ejendals

■ TEGERA®

■ jalas®

CLOSE TO OUR CUSTOMERS

Ejendals operates in a large number of countries globally. We have our own offices or local representatives in most European countries, the United States and the UAE. For more information please visit www.ejendals.com

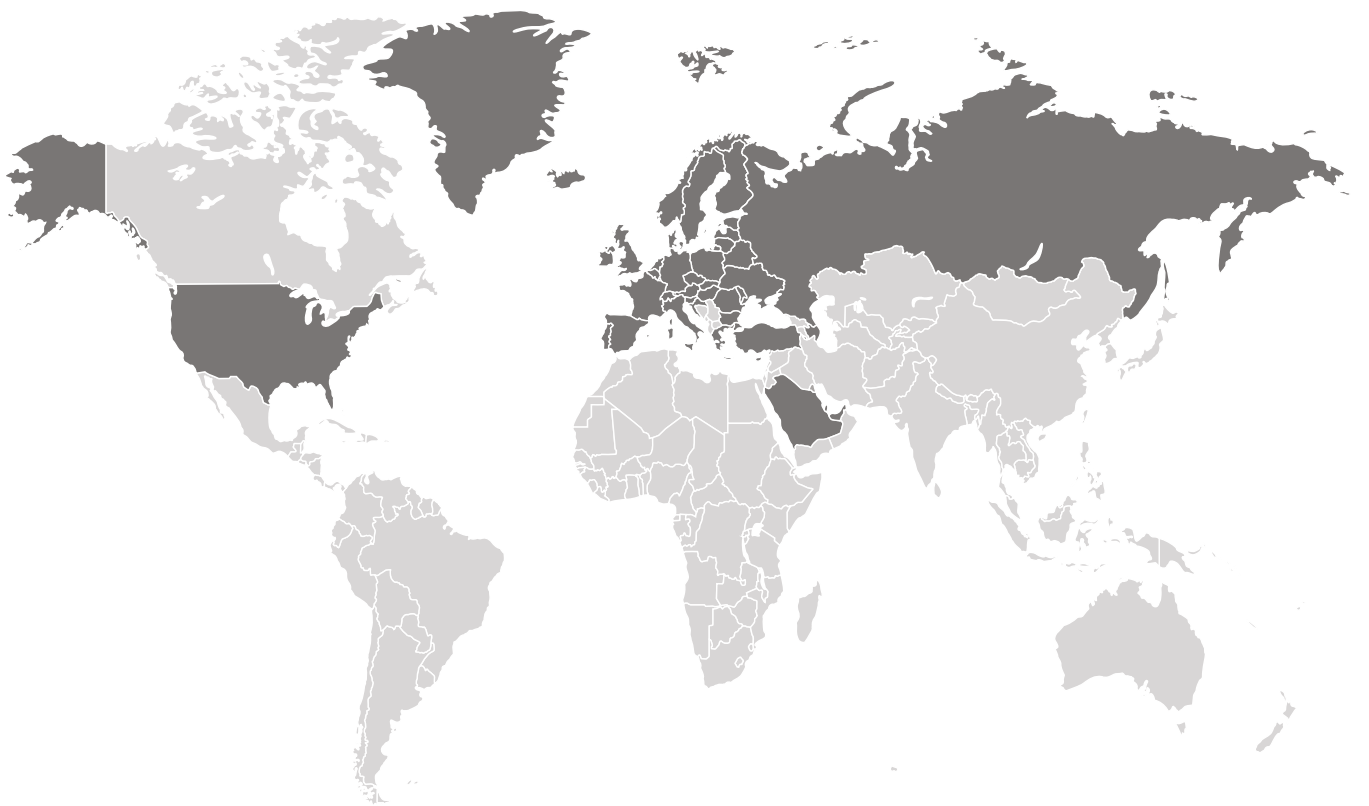

Ejendals AB

Limavägen 28, SE-793 32 Leksand, Sweden

Phone +46(0) 247 360 00

Customer Service UK/Ireland: +46 (0) 247 79 2263

Customer Service Other Countries: +46 (0) 247 79 2263

Fax +46(0) 247 360 91

info@ejendals.com

order@ejendals.com

www.ejendals.com

CONTENTS

Page No.

Protecting hands and feet:
An introduction to Ejendals

4

HAND PROTECTION

Hand protection:

- General information
- Glove collections

12

Mechanical protection:
Precision work

32

Mechanical protection:
Allround work

56

Mechanical protection:
Heavy duty

73

Cut protection

78

Thermal protection:
Cold

98

Thermal protection:
Heat & Welding

115

Special protection


(ESD, vibration, impact, wrist support, chainsaw, uniform)

122

Chemical protection

132

Guide to handwear and footwear symbols on backside of cover flap

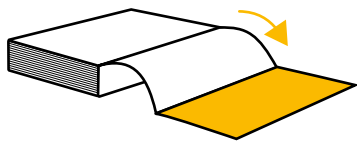

FOOT PROTECTION

Foot protection:

- General information
- Footwear collections

156

Safety footwear:
General purpose

186

Safety footwear:
Cold insulated

218

Safety footwear:
Heat & Welding

223

Occupational footwear

227

Insoles, socks, accessories

238

Product index

256



Protecting hands and feet


Founded in 1949, Ejendals is a family-owned Swedish company specialized in developing, manufacturing and marketing high quality products to protect hands and feet. Our main product brands are TEGERA® gloves and JALAS® shoes. The Ejendals way of working is characterized by a long-term perspective that is reflected in everything from the quality of our products to the way we treat customers and employees and our consideration for the environment.

History

Ejendals was founded in 1949 by Valfrid Ejendal in Leksand, Sweden. The family name derives from nearby Lake Ejen. In the beginning, Ejendals was a clothing company, with a product line that included locally manufactured work gloves. Most of the customers were mills and industries in the region.

Ejendals gradually moved some production abroad, but research and development and testing facilities remain in Sweden and Finland. Safety shoes were added to the Ejendals product range in the 1970s. When Ejendals acquired the Finnish company Urho Viljanmaa OY, which produces JALAS® safety shoes, in 2008, the Ejendals Group was born.

Ejendals has been the market leader in the Nordic region for many years. Recently the company has begun expanding into a large number of new markets globally, with more to come in the coming years. Ejendals is still family-owned, and is now run by Valfrid's grandson, Marcus Ejendal.

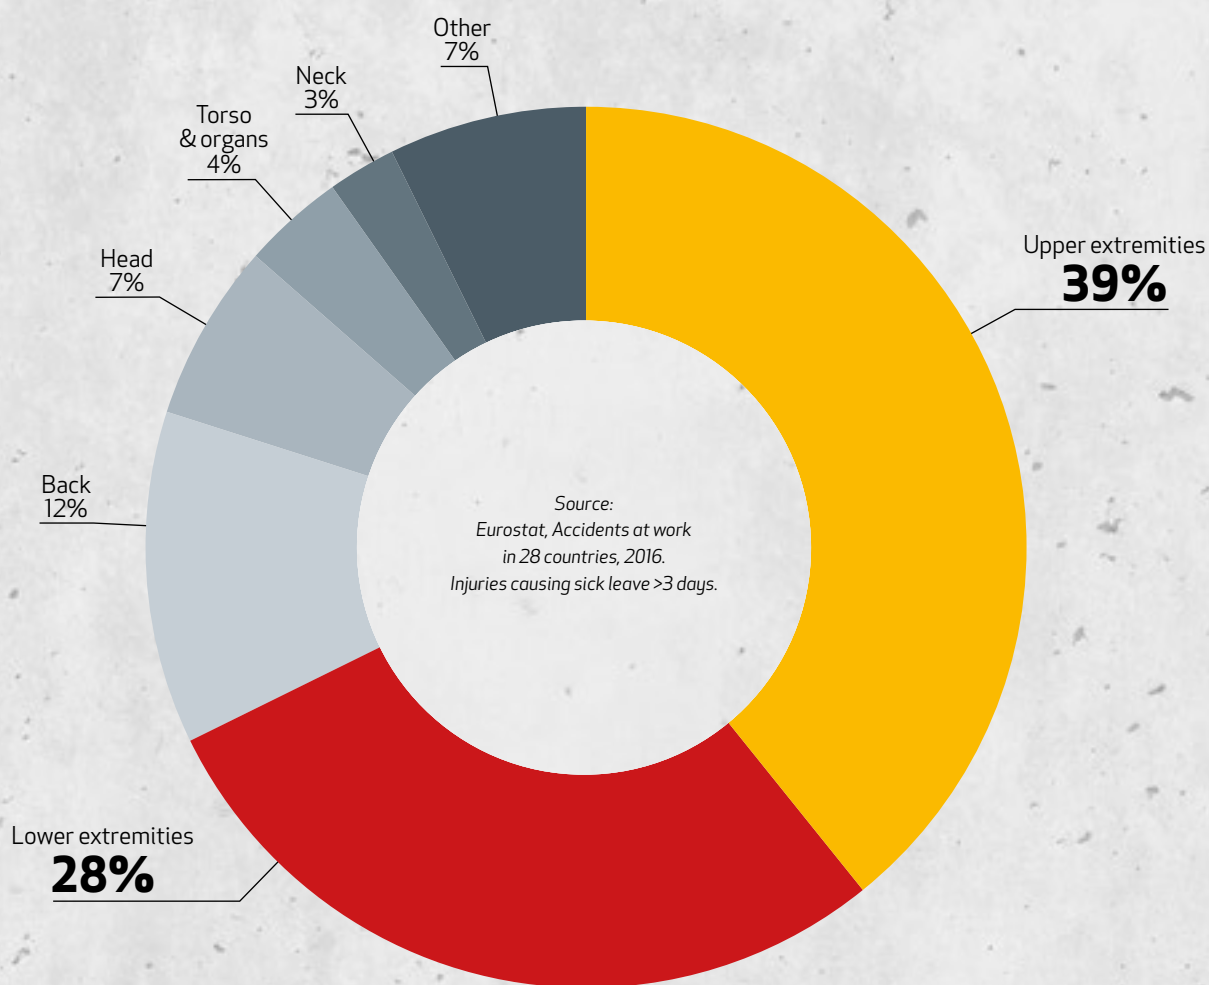

Reducing the risk of preventable injuries

At Ejendals, we have a long history of reducing the risk of preventable injuries to hands and feet. We've been doing it for 70 years.

Statistics show that injuries to hands and feet are the most common injuries requiring sick leaves longer than three days. With the right PPE equipment, many of these injuries are preventable.

Investments in quality hand and foot protection result in fewer occupational injuries, improved levels of attendance and increased productivity, ultimately leading to lower overall costs.



Ejendals' Safety Concept

At Ejendals, we don't just offer gloves and shoes. Our safety concept goes beyond just creating PPE equipment.

The Ejendals Safety Concept encompasses our decades of experience, our approach to quality, and our Nordic ingenuity. Together with our customers, we work to reduce risks and increase long term productivity.

You can't always control your working environment and the conditions, but you can equip yourself with the very best protective gear to prevent accidents and injuries. To ensure that our safety products do what they promise, we submit them to rigorous testing and certification.

When we work with our customers within the Ejendals Safety Concept, the program is always specifically tailored to the customer and their operations. But it usually involves training at the Ejendals Safety Academy. We also perform on-site safety inspections, advise on tools and practices to implement, and do continuous follow-up checks. Lastly and perhaps most importantly, we're always working to strengthen the bonds of trust between our customers and us.



Innovation & testing

Innovation is a driving force at Ejendals and all of our products continually features new designs and product solutions. Our products are the result of extensive research and advanced construction technology, with the aim of satisfying both the ability to protect, and an attention to ergonomics that allows the user the freedom to carry out their tasks without constraint.

Thanks to long relationships with researchers and customers, we constantly receive suggestions for improvements that we can use when developing new products.

Testing is initially done in Leksand, Sweden and Jokipii, Finland but testing for certification is performed by external accredited laboratories (notified body).



Sustainability work and CSR

At Ejendals, we strive to always act in a sustainable, responsible manner in everything we do. Sustainability means that we are careful with finite resources and that we strive to minimize the amount of waste generated from our operations and products.


Corporate social responsibility (CSR) comes naturally to us. At Ejendals we consider the long-term effects of our actions. This includes everything from the quality of our products to how we treat our customers, employees and partners. We see our long-term relationships as proof that we take responsibility for our actions.

To ensure that all our partners do the same, we have established a social code of conduct that we follow. We regularly check the manufacturing process of our products to ensure that our code of conduct is upheld and make regular visits to the factories we work with.





Guide to handwear and footwear
symbols on backside of cover flap

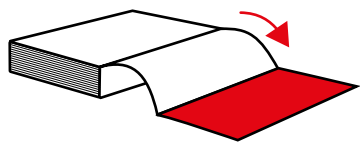

FOOT PROTECTION

	Page No.
<ul style="list-style-type: none">• JALAS® — It starts with your feet• Rules and standards• FootStop Service• Glossary• Footwear collections	156
Safety footwear: General purpose	186
Safety footwear: Cold insulated	218
Safety footwear: Heat & Welding	223
Occupational footwear guide	227
Insoles Socks Accessories	238
Product index	256



Foot
protection

JALAS®

It starts with your feet

JALAS® makes the most technically advanced safety shoes on the market. High quality, comfort, and superior ergonomic features have been its trademark since 1916.

- JALAS® shoes are still proudly designed, developed and manufactured in Jokipii, Finland where they were born 100 years ago.
- Safety shoes have to do more than just protect against falling objects, sharp items, extreme temperatures and slippery surfaces. They also have to be comfortable, well balanced and ergonomic, so you'll wear them all day. That's why the shock-absorbing abilities of JALAS® safety shoes match those of professional running shoes.
- There is a JALAS® safety shoe for every job. Shoe properties are matched to specific applications or environments where they provide the absolute greatest benefit.
- Continuous product development, in-depth materials expertise, a full understanding of the foot, advanced research collaborations, and always adapting to changes in the market and new technological developments keep our shoes at the front of the market.

Safety footwear

Our safety footwear is of the highest possible quality and does not only minimise threats – but also maximises wellbeing. Our footwear meets the highest criteria in terms of safety, slip resistance, stability and ergonomics.

High comfort, low weight, good anatomical properties and ventilation are also equally important factors.

It should always be possible for you to find a shoe that fits your needs. So in addition to a wide variety of models specifically designed for different situations, our product range also covers a wide selection of sizes and come in a wide, regular or narrow fit.

Using a shoe in the wrong environment can be downright dangerous. We will provide you with the right shoe for the right job.



Occupational footwear

Feet are the fundament of your body and they require and deserve shoes with good shock absorption properties, shoes that are sturdy and protective – even if you don't necessarily require safety features such as toecaps or nail penetration inserts.

Our occupational shoes fulfil the same criteria as our safety shoes when it comes to durability, sturdiness, comfort and ergonomics.



RULES AND STANDARDS

All the safety and occupational footwear in our product range comply with EN standards and applicable norms for worker safety within various professional fields. The various EN standards are based on the PPE Regulation (EU) 2016/425.

The table below shows the various protection classes. There are also a number of additional tests – see the fact box for examples.

Please contact customer service at +46(0)247 360 00 if you need help picking the right shoes.

SAFETY FOOTWEAR

TABLE ACCORDING TO STANDARD EN ISO 20345:2011

CLASS		Toecap (200 J/15000 N)	Closed seat region (fully enclosed heel)	A Electrical resistance (0.1-1000 MΩ)	E Energy absorption in the heel area (20 Joules)	WRU Water-repellent upper	Cleated outsole	P Penetration- resistant outsole
I, II	SB	●						
I	S1	●	●	●	●			
I	S2	●	●	●	●	●		
I	S3	●	●	●	●	●	●	●
II	S4	●	●	●	●	●		
II	S5	●	●	●	●	●	●	●

OCCUPATIONAL FOOTWEAR

TABLE ACCORDING TO STANDARD EN ISO 20347:2012

CLASS		Closed seat region (fully enclosed heel)	A Electrical resistance (0.1-1000 MΩ)	E Energy absorption in the heel area (20 Joules)	WRU Water-repellent upper	Cleated outsole	P Penetration- resistant outsole
I, II	OB						
I	O1	●	●	●			
I	O2	●	●	●	●		
I	O3	●	●	●	●	●	●
II	O4	●	●	●	●		
II	O5	●	●	●	●	●	

S Shoes marked S have toecaps which will withstand 200 J of impact energy and 15 kN of pressure.

O Shoes marked with an O are not equipped with a protective steel toecap but meet the basic requirements for work shoes.

Class I Footwear made from leather and other materials, excluding all-rubber or all-polymeric footwear.

Class II All-rubber (i.e., entirely vulcanised) or all-polymeric (i.e. entirely moulded) footwear.

P Penetration-resistant outsole.

HRO Heat-resistant outsole compound tested at 300°C.

WR Water-resistant footwear.

WRU Water-repellent upper.

CI Cold insulation.

HI Heat insulation.

HI3 Heat insulation performance level 3.

Type 2 All fire suppression and rescue interventions where protection against penetration, and toe protection are needed, no protection against chemical hazards.

ESD Electrostatic Discharge.

ESD IEC 61340-5-1 Electrostatic Discharge resistance below 35 MΩ.

SRA Slip-resistance on ceramic tile floor with Sodium lauryl sulphate solution.

SRB Slip-resistance on steel floor with glycerol.

SRC SRA + SRB.

FO Oil-resistant outsole.

A Electrical resistance (0.1-1000 MΩ).

E Energy absorption in the heel area (20 Joules).

JALAS® FootStop Service

All Footwear manufactured with brand name JALAS® and certified according to EN ISO 20345 or EN ISO 20347 meets the requirements when fitted with FootStop Service Insoles.

Repetitive strain injury (RSI) and musculoskeletal disorders are probably the foremost work environment problem in the western world. JALAS® has adopted a comprehensive approach to shoes and insoles.

FootStop Service works as a form of preventative health-care. It cannot, however, replace medical treatment of injuries already sustained. JALAS® anatomical insoles solve many problems – but not all. For people who have severe problems with their feet, orthopedically tested insoles are a must.

In many cases, individually designed orthopaedic soles can be avoided by using JALAS® FSS insoles – available for low, medium and high foot arches.


More about JALAS® FSS insoles on page **238**



FootStopService

BY **jolas**

- FootStop Service makes it possible to analyse feet quickly and easily.
- You can have your feet scanned with your socks on.
- It takes just a few minutes for the scanner to register the arch of the foot and the feet's measurements and points of pressure.
- The results are available directly. The display shows how and where the feet are under pressure and whether the arch is low, high or in between.
- Your local representative can help you arrive at the right shoes and soles.

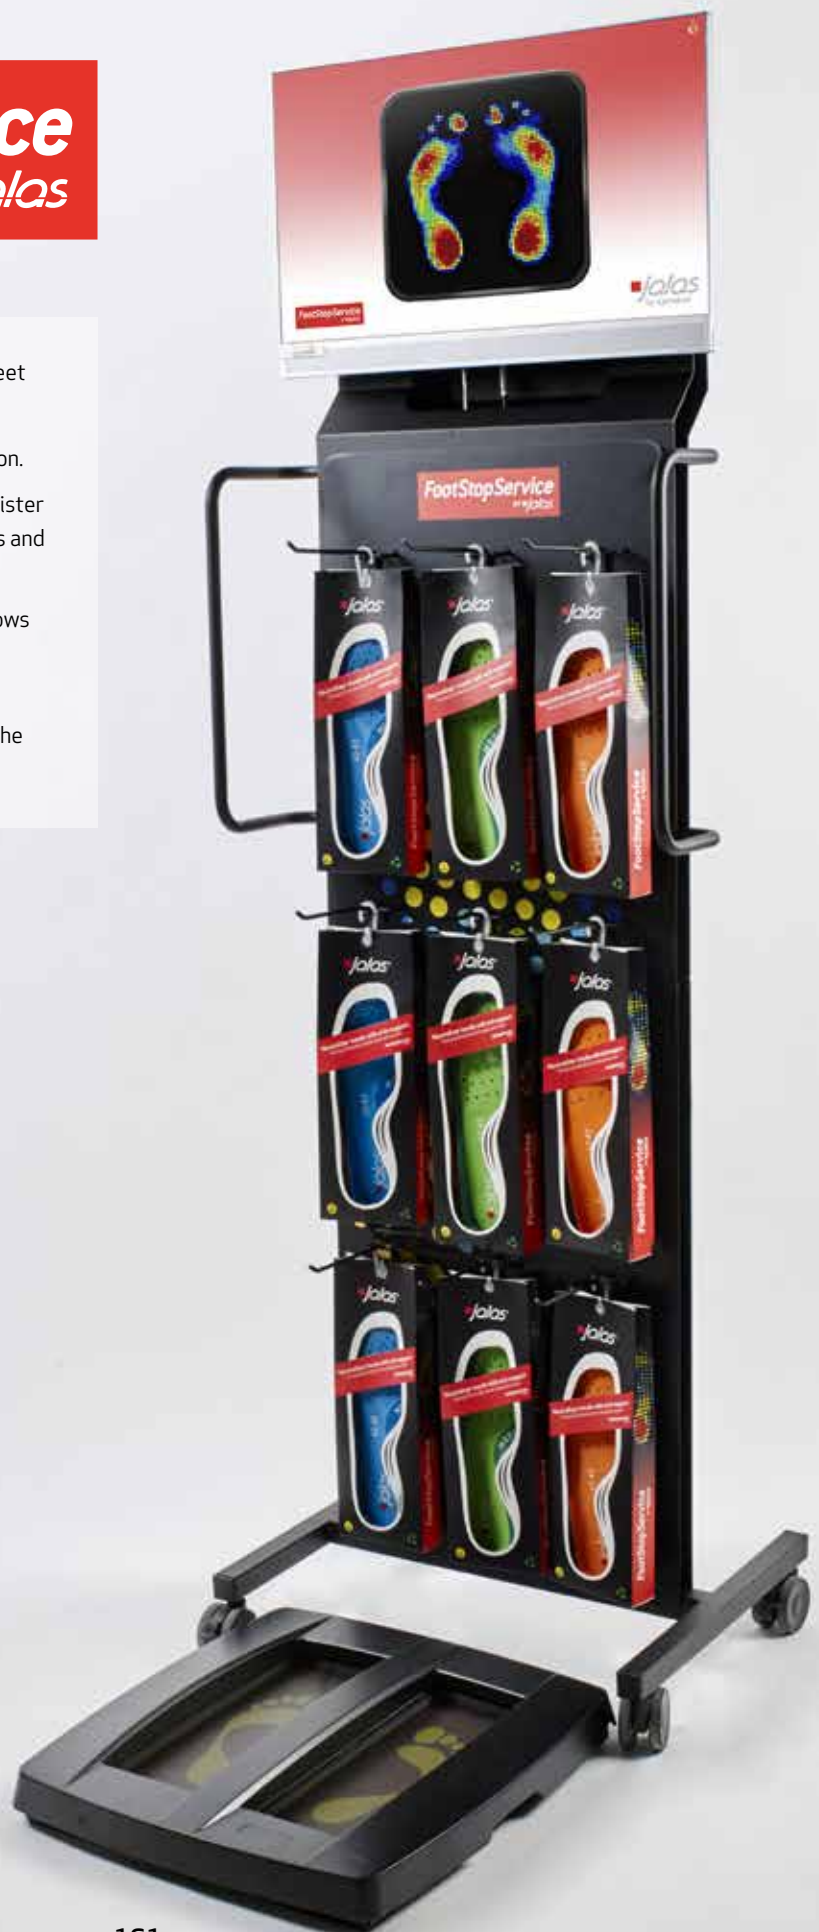

GLOSSARY

INSOLES

Safety footwear is certified under EN ISO 20345:2011 and occupational footwear is certified under EN ISO 20347:2012, with the standard insole fitted at the time of sale.

Only recommended insoles from JALAS® are type-approved for use in JALAS® safety footwear.

If the JALAS® safety footwear has supplementary certification in accordance with DGUV 112-191, insoles of a certified make can be used.

Properties of footwear certified under EN ISO 20345/EN ISO 20347 and/or IEC 61340-5-1 (ESD) cannot be guaranteed if an insole of a different make is used.

All JALAS® standard insoles have a pronounced indent in the heel and built-up arches. The insoles are flexible but stable and adapt to the foot. Provide support in the right places and are very comfortable.

FX1 CLASSIC

Insole with shock absorption under the heel and a textile layer. Conforms to the requirements of ESD-standard (electrostatic discharge).

FX2 CLASSIC

Insole with double shock absorption zones and textile layer. Conforms to the requirements of ESD-standard (electrostatic discharge).

FX2 PRO

Insole with double shock absorption zones in Poron® XRD® and a textile layer. Conforms to the requirements of ESD-standard (electrostatic discharge).

FX2 SUPREME

Insole with double shock absorption zones in Poron® XRD® and a layer of comfortable merino wool. Conforms to the requirements of ESD-standard (electrostatic discharge).

FX2 WINTER

This insole is an advanced winter insole with double shock absorption zones in Poron® XRD®. Merino wool is a soft and pliable natural material that absorbs moisture and retains warmth. Its superior ventilation properties retain warmth in cold temperatures, while also keeping the insole cool in warm temperatures. The foil layer reflects away cold from underneath, while also reflecting and retaining warmth within the shoe. Conforms to the requirements of ESD-standard (electrostatic discharge).

FX3 EXALTER

Insole with a soft, shock-absorbing neo foam layer. The soft EVA layer provides structure, stability and comfort. The hard EVA layer sustains the insole's shape and functionality while providing support and stability. Double shock absorption zones in Poron® XRD®.

FX3 SUPREME

Insole with a soft, shock-absorbing neo foam layer. Double shock absorption zones in Poron® XRD®. Conforms to the requirements of ESD-standard (electrostatic discharge).

OUTSOLE MATERIAL

RPU

The sole has a unique molecular structure with many small suction cups that provide a great grip on wet and slippery surfaces. It is divided into three areas that follow the various step phases in a natural way.

NITRILE RUBBER

Provides a good grip on slippery or wet surfaces – on snow and ice as well. The sole stays soft and flexible, even in very cold temperatures. It is heat resistant up to 300°C and therefore suitable for work in hot environments. The sole can also withstand strong concentrations of chemicals up to a certain limit.

HNBR

Hydrogenated nitrile butadiene rubber is widely known for its physical strength and resistance to heat and oil. It also provides extraordinary grip on wet ice. HNBR remains soft even in very cold climate. Found in footwear with Vibram® Arctic Grip outsole.

PU

Polyurethane is a material that provides footwear with a firm grip and high durability.

TPU

TPU is a thermoplastic polyurethane with very high elastic and wear-resistant properties. Most suitable for indoor or outdoor work in clean, dry environments.

PROPERTIES: OUTSOLE

ANTI-STATIC PROPERTIES

All our safety footwear has anti-static properties in compliance with EN ISO 20345:2011.

ESD

ESD is a supplementary test that is sometimes used where it is essential to remove static electricity from harming fragile equipment and components. The electrical resistance limits of ESD footwear are 100KΩ–35 MΩ and comply with IEC 61340-5-1. All safety footwear from JALAS® with an ESD pictogram comply with IEC 61340-5-1.

SLIP RESISTANCE

All our safety shoes tested according to EN ISO 20345:2011 conforms to one of the following requirements for slip resistance:

SRA – Footwear resistance to slip on ceramic tile floor/SLS

SRB – Footwear resistance to slip on steel floor/glycerine

SRC – Footwear resistance to slip on ceramic tile floor/SLS and on steel floor/glycerine (SRA + SRB)

STABILIZATOR

Extra rigid design with a stabilizer in the arch that reduces the risk of sprain.

FIT AND COMFORT

NARROW/REGULAR FIT

For those who have narrow to normal feet.

REGULAR FIT

Fits most feet.

WIDE FIT

For those who need extra width and height.

BOA® FIT SYSTEM

Get easy one-handed lace tension with a quick turn of the Boa® Fit System. Boa® closures also shed water, mud, and ice, saving precious weight.

LINING

TEBOX/DRILEX®

Durable, ventilating lining material from polyester and polyamid.

MICROFIBER

Material of textile fabric that provides good ventilation and a good climate for the feet.

CAMBRELLE®

Well-ventilated lining material.

TECHNICAL FLEECE

A micro-thin technical fleece lining for all-year comfort.

SYNTHETIC FUR

A warm lining in a mix of wool and synthetic fiber for warmth and durability.

MEMBRANE+LAMINATE

Membrane and laminate with water-repellent and ventilating properties.

DRYLOCK

Water-resistant, breathable membrane from JALAS®. Sealed seams that keep your feet warm and dry.

WATER-REPELLENT

Leather and/or textile with water-repellent membrane or coating.

RESPIRO

Respiro is the name of a JALAS® collection equipped with an ultra-high breathable three-layer laminate fitted into the outsole (provided by IQTEX based on patented technologies). The laminate has an ultra-high air permeability, yet it is also waterproof. This behaviour is made possible by the superabsorbent polymers in the laminate, which swell in contact with water thereby sealing the cavities within. The physical properties within the laminate change according to the environment. In dry conditions there is plenty of space for air to pass through. In wet conditions the superabsorbent polymers swell and close up the material. The ultra-high breathability of the laminate removes water vapour, and the well-being remains even at intense activity or higher temperatures.

IMPACT PROTECTION

D30®

An intelligent impact-absorbing material that doesn't collapse when exposed to external force. The molecular net structure efficiently distributes the force to the sides. D30® can be used both in extreme cold and in high temperatures.

PORON® XRD®

Poron® XRD® is a material which has unique shock-absorbing properties – the material is softer when you stand and stiffens when you walk for extra impact absorption.

NEO FOAM

Excellent shock absorption properties with added comfort and softness.

TOE WEAR PROTECTION

PRONOSE

Extra PU wear protection across the toecap prolongs the shoe's life. Found with a few exceptions in shoes of protection class S1P and S3.

SAFETY TOECAPS

All safety toecaps comply with EN ISO 20345:2011.

The requirements are as follows:

- Impact energy of 200 Joules
- Compression of 15,000 Newtons

ALUMINIUM

Weighs only about 50 grams. The shoe becomes lighter and the centre of gravity is moved backwards, improving balance and reducing strain on the shin muscles. Found in most JALAS® shoe models.

STEEL

Found in some of JALAS® safety footwear models. Highly durable toe-cap with slim design.

COMPOSITE

Metal-free toe-cap with low weight. Similar properties as aluminium.

NAIL PROTECTION

All nail protection conforms to EN ISO 20345:2011. The requirement is that shoes must withstand penetration of 1.1 kN from a nail measuring 4.5 mm in diameter.

STAINLESS STEEL

This nail protection feature prevents nails and other sharp objects from penetrating the shoe.

SOFT PLASMA-TREATED TEXTILE

This nail protection is made out of plasma-treated textile which makes it soft and light. Prevents nails and other sharp objects from penetrating the shoe.

ZENIT

The premium collection of safety footwear



Zenit is the premium collection of safety footwear from JALAS®, awarded with the prestigious Red Dot Design Award for its protective high quality and usability. Superior comfort comes from dual absorption zones in the FX2 insole, high density, foam-padded lining and exceptional stability. The Boa® Fit System adds custom comfort with smooth, even closure and no pressure points. The soft and lightweight RPU outsole perfects the experience.



reddot design award
winner

**HIGH BREATHABILITY
AND DURABILITY**
with microfiber upper

BOA® FIT SYSTEM
(1708, 1718, 1728, 1738)

**ULTIMATE
COMFORT AND
ERGONOMICS**
FX2 insole with
double shock
absorption
zones of
Poron® XRD™



**ALUMINIUM
TOECAP**
for lightweight
protection

**PTC NAIL
PENETRATION
INSERT**
(S1P & S3 models)
1718: Nail protection
material in steel

**CONFIDENT STABILITY AND
SECURE GRIP ON LADDERS**
with Stabilizator arch support
system

EXTRA HIGH SLIP RESISTANCE
Zenit platform with outsole of
RPU



ZENIT PLATFORM

The Zenit outsole is made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles. Extremely durable, yet soft and comfortable. Stabilizator arch support system provides secure grip on ladders and adds stability. Suitable for users in the manufacturing sector and for artisans. Excellent for both indoor and outdoor work.

- Fitting: Regular
- Hard-wearing
- Oil resistant
- Stabilizator arch support
- ESD & Antistatic
- Slip resistance: SRC



BOA® FIT SYSTEM



Push to engage



Turn to tighten



Pull up for
quick release

STREET

Sneaker-style
safety footwear

Trendy, modern and very comfortable sneaker-style footwear with all the protective qualities of traditional safety footwear. RPU sole for the ultimate in grip. The lining breathes, which makes the shoe airy, comfortable and pleasant to wear for extended periods of time. Based on the Zenit platform.



S1



JALAS® 3020 ZENIT

S1 SRC

S1P



JALAS® 1708 ZENIT

S1P SRC BOA®



JALAS® 3008 ZENIT

S1P SRC

S2



JALAS® 3030 ZENIT

S2 SRC

S3



JALAS® 3018 ZENIT

S3 SRC



JALAS® 1718 ZENIT

S3 SRC BOA®

S3



JALAS® 1728 ZENIT

S3 SRC CI BOA®



EXTREMELY
COMFORTABLE

JALAS® 1738 ZENIT

S3 SRC BOA®

STREET Collection

S3



JALAS® 3045

S3 SRC



JALAS® 3055

S3 SRC

ZENIT EVO

Our most comfortable safety shoe.
Ever.



Designed for light duty environment use, all six Zenit Evo models combine a lightweight sporty design and sock-like ergonomic fit, seamless construction and enhanced breathability, as well as JALAS® signature foot protection.

Inspired by the stretch-knit fabrics in modern athletic shoes, the sleek and virtually seamless upper shapes to fit the foot. Thanks to innovative, high-tech materials the Zenit EVO is 10-15% lighter than its predecessor. The latest Boa® L6 Fit System was added for a perfect fit.

When it comes to comfort, a seven-layer cushioning system provides an unparalleled level of foot support and protection. Each layer has a specific function – from JALAS® advanced FX3 Supreme insole, with arch and heel support, to the stable yet flexible midsole. While the plastic stabilizing shank prevents twisting, pads of Poron® XRD™ foam protect the ball and heel of the foot from extreme impact.

ADDED BREATHABILITY

provided through seamless knitted upper and lining

SOCK-LIKE ERGONOMIC COMFORT

Based on high-tech materials and JALAS® know-how in ergonomic foot protection

ALL-DAY COMFORT

due to lightweight materials

ALUMINIUM TOECAP for lightweight protection

SHOCK ABSORPTION AND ERGONOMIC COMFORT

with optimised, seven-layer cushioning system

PTC NAIL PENETRATION INSERT for light weight and comfort

SUPERIOR GRIP AND COMFORT from molecular structured RPU outsole material



CUSTOM PLATFORM

The Custom platform is made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles. Suitable for users in the manufacturing sector and for artisans. Excellent for both indoor and outdoor work.

- Hardwearing, soft and light weight
- Special gripping pattern with large contact area
- Reduces shock forces to knees, hip and lower back
- Outstanding all day cushioning
- Fitting: Regular
- Slip resistance: SRC
- ESD & Antistatic
- Oil resistant



GET A GRIP

The special grip pattern contains suction cups and is spread out over a large contact area to keep you on your feet even on wet or oily surfaces.

BOA® FIT SYSTEM



Push to engage



Turn to tighten



Pull up for quick release

S1



JALAS® 7100 ZENIT EVO

S1 SRC 

S1P



JALAS® 7108 ZENIT EVO

S1P SRC   BOA®

S1P



JALAS® 7118 ZENIT EVO

S1P SRC   BOA®



JALAS® 7128 ZENIT EVO

S1P SRC  

S3



JALAS® 7138 ZENIT EVO

S3 SRC   BOA®



JALAS® 7148 ZENIT EVO

S3 SRC  

RESPIRO

Highly breathable
safety footwear



The JALAS® Respiro collection, with its unique triple-membrane laminate in the outsole, breathable upper and ventilated insole, is the most breathable line of safety shoes on the market today.

It's no secret that standard outsoles create an impermeable covering under the feet, trapping natural perspiration and resulting in a build-up of moisture – leading to hot, sweaty and smelly feet. To combat this, the JALAS® Respiro controls the climate inside the shoe with a unique design and materials technology that ensure you have a cool, dry and comfortable workday.



STABILIZER PLATFORM

Stabilizer is made of TPU, and is equipped with a three-layer laminate with ultra-high air permeability provided by IQTEX based on patented technologies. Suitable for clean, dry industrial environments. Stabilizer arch support system provides secure grip on ladders and adds stability.

- Suitable for clean, dry environments
- Very breathable, yet waterproof
- Fitting: Regular
- Oil resistant
- Slip resistance: SRB
- ESD & Antistatic



**UPPER MATERIAL
AND PATTERN DESIGN**
For durability and
breathability

ALUMINIUM TOECAP
Lightweight protection

**DUAL SHOCK
ABSORPTION**
With FX2 Supreme
insole

**CONFIDENT STABILITY AND
SECURE GRIP ON LADDERS**
with Stabilizer arch support
system

TPU/PU OUTSOLE
For added slip resistance




BREATHABLE OUTSOLE
With unique laminate technology

S1




JALAS® 3820R RESPIRO

S1 SRB 




JALAS® 3800R RESPIRO

S1 SRB 

S1



JALAS® 3510R RESPIRO

S1 SRB 


S2



JALAS® 3700R RESPIRO

S2 SRB  


Foot
protection

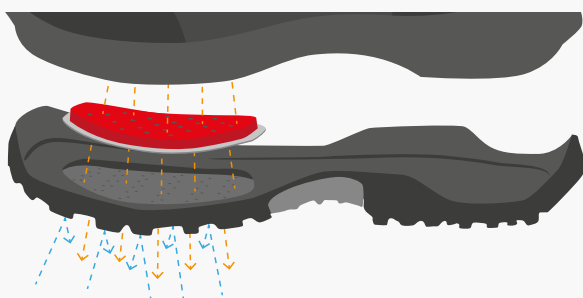


A climate control system

One of the key elements in our climate-controlled safety shoe is the patented IQTEX triple-layer laminate, a breathable and waterproof material that regulates itself to suit the conditions inside and outside.

**OUTSOLE MATERIAL IN
DRY CONDITIONS: BREATHABLE**

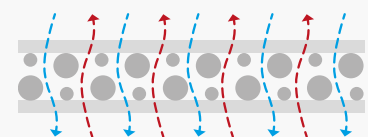

**OUTSOLE MATERIAL IN
WET CONDITIONS: WATERPROOF**

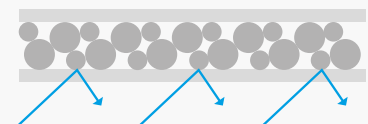

EXALTER

Engineered for maximum performance



Exalter shoes have a sporty look and feel without compromising on the protection you need for demanding work days. The aluminium toe cap protects the toes from falling objects and the Vibram nitrile rubber outsole offers superior slip resistance. The shoes also have ESD and antistatic functionality.

The four new models in the JALAS® Exalter collection have a sock-like construction for comfort and breathability. Boa® Fit System on the side, for minimum pressure on the foot and easy closure. The breathable polyamide lining absorbs moisture and keeps feet dry and cool. The four-layer insoles feature Poron® XRD™ for comfort and shock absorption on even the longest work days.

BREATHABLE

Polyamide lining absorbs moisture and keeps feet dry and cool

COMFORT AND SHOCK ABSORPTION

with four layer insoles including Poron® XRD™

HIGH COMFORT AND ERGONOMICS

Still feels comfortable after a long work day

PTC NAIL PENETRATION INSERT

for light weight and comfort

DURABLE

Microfiber upper and over molding gives good support and protection

BOA FIT SYSTEM

9538, 9548

BOA® FIT SYSTEM ON THE SIDE

for comfort and easy closure: 9925, 9945, 9965, 9985

ALUMINIUM TOE CAP

for lightweight protection

EXTRA FLEXIBLE OUTSOLE

thanks to special design in ball of foot area

CONFIDENT STABILITY AND SECURE GRIP ON LADDERS

with Stabilizator arch support system



PERFORMANCE PLATFORM

Nitrile rubber outsole developed in collaboration with Vibram®. The specially designed, pyramid-shaped pattern creates superior grip and slip resistance. Reinforced seat section for maximum heel support and better shock absorption. Specially designed flexible construction at the front of the sole. Stabilizator arch support system provides secure grip on ladders and adds stability.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC



BOA® FIT SYSTEM



Push to engage



Turn to tighten



Pull up for quick release

FLOW

A fit for women, safety for the job

The Flow collection is everything you expect from a JALAS® safety shoe – with a better fit for women. Wearing shoes with a poor fit is not just uncomfortable, but also a risk to your feet, knees, hips, neck and spine. JALAS® Flow is the safety shoe for narrow feet with broad tasks, available from size 34 and up. Flow models come with the Performance platform, the same as the Exalter collection.



S1



JALAS® 9500 EXALTER

S1 SRC HRO



JALAS® 9520 EXALTER

S1 SRC HRO

S1P



VERY BREATHABLE
COMFORTABLE SOCK-
LIKE CONSTRUCTION

JALAS® 9925 EXALTER **NEW**

S1P SRC HRO



VERY BREATHABLE
PROVIDES ANKLE
SUPPORT AND
EXCELLENT
SHOCK ABSORPTION

JALAS® 9945 EXALTER **NEW**

S1P SRC HRO



JALAS® 9538 EXALTER

S1P SRC HRO



JALAS® 9518 EXALTER

S1P SRC HRO

S3



COMFORTABLE SOCK-
LIKE CONSTRUCTION

JALAS® 9965 EXALTER **NEW**

S3 SRC HRO



PROVIDES ANKLE
SUPPORT AND
EXCELLENT
SHOCK ABSORPTION

JALAS® 9985 EXALTER **NEW**

S3 SRC HRO



JALAS® 9548 EXALTER

S3 SRC HRO



JALAS® 9568 EXALTER

S3 SRC HRO



JALAS® 9508 EXALTER

S3 SRC HRO



JALAS® 9528 EXALTER

S3 SRC HRO

FLOW collection

S1P

NARROW FIT



JALAS® 9605 FLOW

S1P SRC HRO

S3

NARROW FIT



JALAS® 9615 FLOW

S3 SRC HRO


DRYLOCK

Waterproof footwear



The Drylock collection has a waterproof membrane which is also breathable and leads away sweat and moisture. The Nitrile rubber outsoles of the Drylock collection has very good slip resistance, and is ideal for those who work on slippery and wet surfaces.

360° WATERPROOF DRYLOCK MEMBRANE

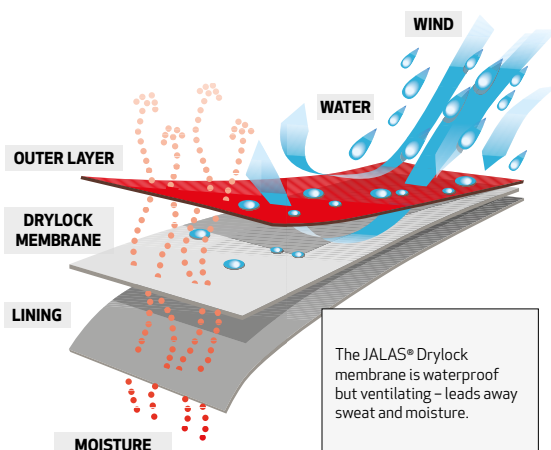

EXTREMELY DURABLE
nitrile outsole

NAIL PROTECTION MATERIAL: STEEL

**ALUMINIUM
TOECAP**
for lightweight
protection

FIRE

Waterproof fire and rescue footwear

Waterproof fire and rescue footwear, also suitable for mining. JALAS® firefighter footwear has heat-resistant and oil-resistant nitrile outsole and heat-resistant PU-coated leather upper. KEVLAR® thread in the seams. Both models are CE-approved S3-class safety footwear equipped with toe and metal nail penetration protection.



GRIP PLATFORM

Made of nitrile rubber, an extremely durable material. Suitable for industrial workers and craftsmen, both indoors and outdoors.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRB



Model 9552:
PERFORMANCE PLATFORM
(regular fit)
For full description, see the
Exalter collection (p. 170)






Model 1818 & 1578:
ENDURO PLATFORM
(wide fit)
For full description, see the
Gran Premio collection (p. 176)



Waterproof S3






JALAS° 3305 DRYLOCK

S3 HRO WR SRB   



JALAS° 3308 DRYLOCK

S3 HRO WR SRB   






WIDE FIT

JALAS° 1818 DRYLOCK WIDE

S3 SRC CI WR HRO    






JALAS° 3318 DRYLOCK

S3 HRO WR SRB   



JALAS° 3328 DRYLOCK

S3 HRO WR SRB   



JALAS° 3325 DRYLOCK

S3 HRO WR SRB     



JALAS° 3778 DRYLOCK

S3 HRO WR SRB     



JALAS° 1578 FIRE & RESCUE

FIPA SRC CI     

**WATERPROOF
HEAT-RESISTANT
WIDE FIT**



JALAS° 4768 FIRE


F2A SRA CI    

**WATERPROOF
HEAT-RESISTANT
REGULAR FIT**

Waterproof O2 (Occupational footwear)




JALAS° 3312 DRYLOCK

O2 SRB WR HRO FO 




JALAS° 9552 COMBAT

O2 SRC WR HRO FO 



JALAS° 3322 DRYLOCK

O2 SRB WR HRO FO 

HEAVY DUTY

Developed for demanding work environments



JALAS® HEAVY DUTY safety shoes have been developed for the most demanding work days. For tough environments and severe conditions. Eight ultra-durable models combine extraordinary safety features and protection with flexible and ergonomic comfort. Soft and shock-absorbing mid- and insoles prevent injuries on feet and back.

Metal free meets Artic Grip

Areas of use: Ideal for building and construction work, heavy manufacturing, transportation and environments requiring metal free equipment.

Metal-free protective features needed for heavy duty work in any environment:

- Composite toecap shields foot from impact from heavy objects
- PTC sole insert protects from injuries from sharp objects on the ground

Advanced winter models

Two rugged winter models with soft thermo-lining and Vibram® Arctic Grip outsole to withstand extreme cold and icy surfaces.

Areas of use: Work outside in cold climate.

Original Heavy Duty models

Durable workhorses designed for the harshest, most demanding work environments.

Areas of use: Building and construction and heavy duty manufacturing. Outdoors and indoors.



BOA® FIT SYSTEM



Push to engage



Turn to tighten



Pull up for quick release



ARCTIC GRIP PLATFORM

Prevents falls even on extremely slippery, oily, or icy surfaces. Unique gripping traction on icy surfaces with non-metal gripper lugs. Made of heat- and oil-resistant HNBR rubber, which remains soft even in very cold climate. Draining channels remove oil, water and dirt. Stabilising arch support system provides secure grip on ladders and adds stability.

- Withstands heat up to 300°C
- Fitting: Regular
- Slip resistance: SRC
- Antistatic
- Oil resistant



BALANCE PLATFORM

For safe and secure grip. Made of nitrile rubber, an extremely durable material. Draining channels remove oil, water and dirt and provide flexibility where it matters. Different surface patterns provide grip in the different step phases. The Stabilizer arch support system provides secure grip on ladders and adds stability.

- Shock absorbing PU midsole
- Withstands heat up to 300°C
- Fitting: Regular
- Slip resistance: SRC
- ESD & Antistatic
- Oil resistant



S3 NEW MODELS WITH ARCTIC GRIP PLATFORM

	PORON® XRD™ IMPACT PROTECTION ON THE SIDES AND TONGUE AIRPORT-FRIENDLY		METAL-FREE PORON® XRD™ IMPACT PROTECTION ON THE SIDES
JALAS® 1358 HEAVY DUTY NEW		JALAS® 1368 HEAVY DUTY NEW	
S3 HI CI AN HRO SRC    BOA®		S3 HI CI AN HRO SRC    	

	AIRPORT-FRIENDLY		METAL-FREE LIGHT AND COMFORTABLE
JALAS® 1338 HEAVY DUTY NEW		JALAS® 1348 HEAVY DUTY NEW	
S3 SRC CI HRO HI    BOA®		S3 SRC CI HRO HI   	



On models 1358 and 1368, Poron® XRD™ is used on the sides, ankle and tongue of the shoe to protect the foot from outside impact. This unique material feels remarkably soft until exposed to pressure or impact, at which time it hardens to protect the foot from external injury. The material also provides superior ankle support.



JALAS® 1358 has Poron® XRD™ padding on the sides and tongue of the shoe, and JALAS® 1368 has Poron® XRD™ on the sides of the shoe. An classification according to EN ISO 20345.

S3 WINTER MODELS WITH ARCTIC GRIP PLATFORM

	ONE OF OUR BEST-SELLING WINTER BOOTS	
JALAS® 1378 HEAVY DUTY		JALAS® 1388 HEAVY DUTY
S3 SRC CI HRO     		S3 SRC CI HRO    



S3 ORIGINAL MODELS WITH BALANCE PLATFORM

		
JALAS® 1258 HEAVY DUTY	JALAS® 1268 HEAVY DUTY	JALAS® 1278 HEAVY DUTY
S3 SRC CI HRO HI     	S3 SRC CI HRO HI     BOA®	S3 SRC CI HRO HI     BOA®

GRAN PREMIO

Heavy duty protection
with a wider fit



Gran Premio is the range of shoes and boots with a wider fit from JALAS®. The products of the Gran Premio collection are suitable for heavy duty conditions – both indoors and outdoors – and offers superior grip on cold and snowy surfaces.

EXTRA WARM WINTER MODELS (1808 & 1898)

with three functional layers of lining

DURABLE AND HEAT RESISTANT OUTSOLE
made of nitrile



DESIGNED FOR HEAVY DUTY CONDITIONS

Durable PU-coated leather upper

ALUMINIUM TOE CAP
for lightweight protection

SIP & S3 MODELS:
NAIL PENETRATION INSERT OF STEEL
for heavy duty protection
PTC NAIL PENETRATION INSERT
(1808, 1848K, 1898, 1948)
for light weight and comfort

CONFIDENT STABILITY AND SECURE GRIP ON LADDERS
with Stabilizer arch support system

WIDE FIT
Extra width and height for the foot



ENDURO PLATFORM

Made from nitrile rubber. Wide fit and shock absorption in the heel. Structural patterns ensure good grip sideways, forwards and backwards. Drain channels remove oil, water and dirt. Different surface patterns provide solid grip however you move. The Stabilizer system provides support for the arch and ensures good grip on ladders.

- Fitting: Wide
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC



JALAS® 1848K and 1868:
Thinsulate™ heat insulation
Flammability: Class 1 - as tested according to procedure described in 16 CFR Part 1610, Federal Flammable Fabrics Act.

S1



JALAS® 1510

S1 SRC HRO

S1P



JALAS® 1518

S1 P SRC HRO

S2



JALAS® 1540

S2 SRC HRO CI



JALAS® 1550

S2 SRC HRO CI

S2



JALAS® 1870

S2 SRC HRO CI

S3



JALAS® 1538

S3 SRC CI HRO HI



JALAS® 1548

S3 SRC CI HRO



JALAS® 1568

S3 SRC CI HRO

S3



JALAS® 1828

S3 SRC CI HRO HI



JALAS® 1948

S3 SRC CI M HRO HI AL FE WG

FOUNDRY & WELDING
BOOT WITH METATARSAL
PROTECTION + KEVLAR
STITCHING FOR
HEAT PROTECTION



JALAS® 1848

S3 SRC CI HRO HI

KEVLAR STITCHING FOR
HEAT PROTECTION + HEAT
REFLECTING LINING



JALAS® 1848K

S3 SRC CI HRO

KEVLAR STITCHING FOR
HEAT PROTECTION

S3



JALAS® 1868

S3 SRC CI HRO HI

KEVLAR STITCHING FOR
HEAT PROTECTION



JALAS® 1898

S3 SRC CI HRO

WINTER/WELDING BOOT
KEVLAR STITCHING FOR
HEAT PROTECTION



JALAS® 1878

S3 SRC CI HRO HI



JALAS® 1808

S3 SRC CI HRO

S3



JALAS® 1858

S3 SRC CI HRO

02 (Occupational footwear)



JALAS® 1872

O2 SRC HRO CI FO




JALAS® 1822

O2 SRC HRO CI FO

GRIP

Classic JALAS® safety footwear

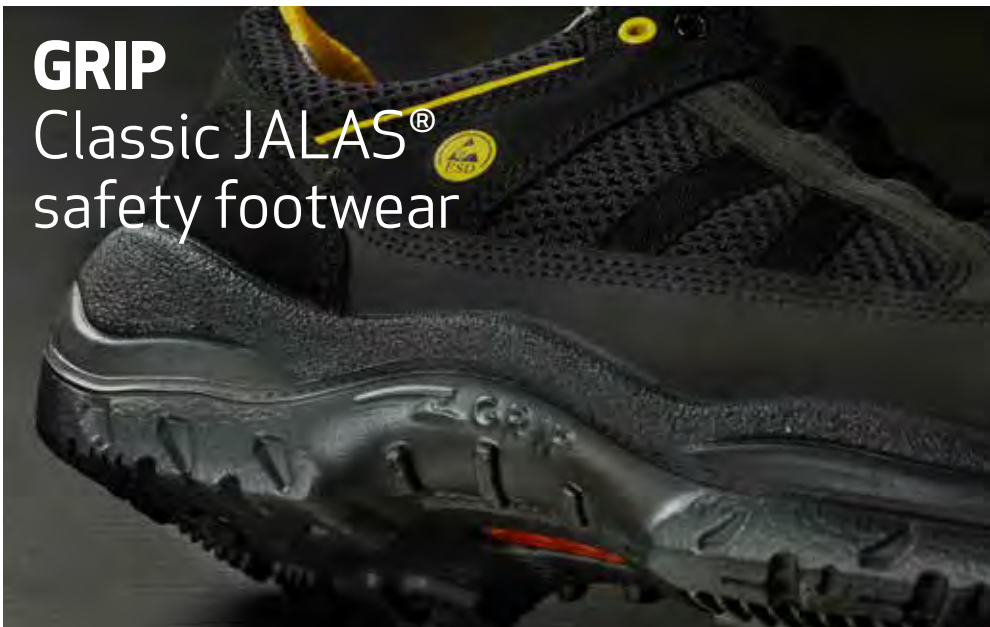

GRIP PLATFORM

Made of nitrile rubber, an extremely durable material. Suitable for industrial workers and craftsmen, both indoors and outdoors.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRB




A collection of high quality and comfortable safety footwear from JALAS®. The outsole is made from PU/Nitrile, and ensures good grip and usability for industrial environments. Models for both indoor and outdoor use.

S1




JALAS® 3920A

S1 HRO SRB 





JALAS® 3100

S1 HRO SRB 

S1P





JALAS® 3108

S1P HRO SRB  

S2





JALAS® 3110

S2 HRO SRB  



JALAS® 3150

S2 HRO SRB  





JALAS® 3941

S2 HRO SRB    

S2






JALAS® 3780

S2 SRB HRO CI  

S3




JALAS® 1335

S3 SRB HRO CI   



JALAS® 3118

S3 HRO SRB   

VIP

All the safety in a business suit



The VIP safety series is specially developed for management and office workers that need a business shoe with safety protection. Steel toecap and PTC non-metallic sole insert protects feet from falling objects and nails and other sharp objects on the ground. Made in full grain leather and with all leather lining makes the shoe comfortable and breathable. Shock absorbing Poron® XRD™ material in insoles makes the shoes comfortable and prevents injuries on feet and back. A rubber outsole with structure patterns gives a safe grip.

The VIP occupational series is a classic business shoe for office work, hotel- and restaurant, and other service sectors. These shoes are of course ESD compliant. A PU outsole gives a good and safe grip.



VIP PLATFORM

Made of nitrile rubber, an extremely durable material.

- Fitting: Narrow/Regular
- Oil resistant
- ESD & Antistatic



COMFORT PLATFORM

Made of PU.

- Fitting: Regular
- Oil resistant
- ESD & Antistatic



S3



JALAS® 2108 VIP SAFETY **NEW**

S3 SRA HRO



JALAS® 2118 VIP SAFETY **NEW**

S3 SRA HRO



JALAS® 2128 VIP SAFETY **NEW**

S3 SRA HRO

02 Occupational footwear



JALAS® 2102 VIP

O2 SRA FO



JALAS® 2112 VIP

O2 SRA FO




JALAS® 2142 VIP **NEW**

O2 SRA FO

GREEN LINE

Metal-free and environmentally friendly protection

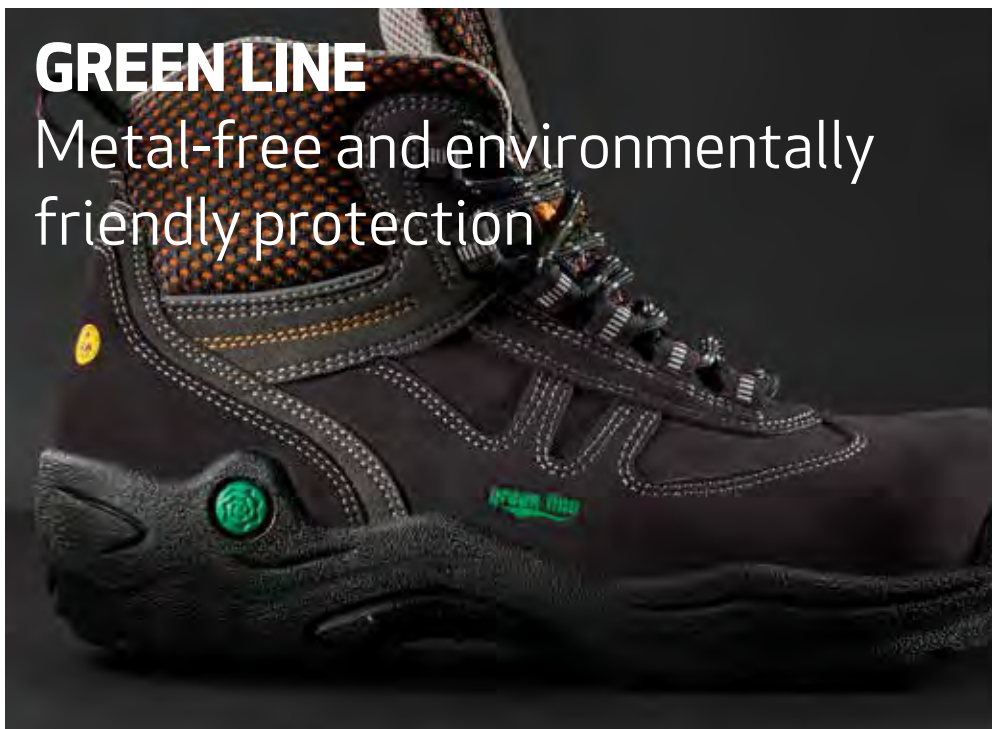

The shoes in JALAS® Green Line collection contain no metals; instead of using metal in the anti-puncture protection and toecap, we have used materials that are especially environment-friendly for the shoe's entire life cycle. Metal-free and environmentally certified safety shoes for those with high demands in terms of comfort and caring for the environment. Ideal for environments where metal-free shoes are a requirement. The FX2 Supreme insole with dual absorption zones comes as standard.

JALAS® Green Line is the first collection of safety footwear to be given the EU Ecolabel. The Ecolabel certificate is only awarded to products that meet the strict limit values specified for energy consumption and environmental friendliness and do not contain chemicals that are harmful to people.

Areas of use: Suitable for work where metal-free footwear is required, e.g., at nuclear power plants, airports, prisons, and in police work.



GREEN LINE PLATFORM

Made from PU, a material suitable for many different environments. Suitable for work where metal-free footwear is required, e.g., at nuclear power plants, airports and prisons, and in police work.

- Fitting: Narrow/Regular
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC



THE EU ECOLABEL FOR FOOTWEAR GUARANTEES:

- Limited water pollution during production
- A reduction of emissions of volatile organic compounds during production
- The exclusion of substances harmful to the environment and health
- Limited residues of metals and formaldehyde the final product
- The use of recycled packaging
- The careful control of different aspects of durability

Foot
protection

DRY COMFORT
with breathable
Cambrelle® and
polyamide lining

ENVIRONMENTAL FRIENDLY
biodegradable microfiber and
textile upper

METAL-FREE PROTECTION
with composite toecap

SHOCK ABSORPTION
in heel area with
Poron® XRD™

ADDED STABILITY
with plastic shank piece

METAL-FREE PROTECTION
with PTC penetration insert

**SHOCK ABSORPTION
ZONE** with Poron® XRD™



S1P



JALAS® 6418 BIO



S1P SRC



S3



JALAS® 6458 PRIMA WHITE

S3 SRC



JALAS® 6428 PRIMA

S3 SRC



JALAS® 6468 EKO

S3 SRC




JALAS® 6498 NATURE

S3 SRC



JALAS® 6438 TEMPERA

S3 SRC



M-SPORT, E-SPORT & S-SPORT

Sporty, light weight comfort



M-SPORT PLATFORM

Made from PU, a material suitable for many different environments. Suitable for industrial work and artisans, both indoors and outdoors.

- Fitting: Regular
- ESD & Antistatic
- Oil resistant
- Slip resistance: SRC



One of our most popular collections of safety shoes, and it's not hard to see why: JALAS® M-Sport is our lightest shoe collection, attractive and well-balanced. And above all, they are incredibly comfortable.

The E-Sport and S-Sport are further developments of the original M-Sport collection. The White collection is based on the M-Sport platform.

Foot
protection

**DUAL SHOCK
ABSORPTION INSOLE**
for soft cushioning and
impact resistance

1618: CPU OVERMOLDING
to provide wear resistance
and extra durability

ALUMINIUM TOECAP
for strong, lightweight
toe protection

**SIP & S3 MODELS:
PLASMA-TREATED
COMPOSITE (PTC) INSERT**
nail penetration protection

PLASTIC SHANK PIECE
for stability and safety

**SLIP-RESISTANT
PU OUTSOLE**

SINGLE-DENSITY PU OUTSOLE
for comfort and light weight



S-SPORT



JALAS® 1618 S-SPORT

S3 SRC   

E-SPORT



JALAS® 1605 E-SPORT

SIP SRC  



JALAS® 1615 E-SPORT

S3 SRC CI   




JALAS® 1625 E-SPORT

S3 SRC CI   

M-SPORT



JALAS® 3400A MONZA SPORT

S1 SRC 



JALAS® 3408A MONZA SPORT

SIP SRC  



JALAS® 3460A LIGHT SPORT

S2 SRC  



JALAS® 3468A LIGHT SPORT

S3 SRC   




JALAS® 3498 HIGHLIGHT

S3 SRC   

OTHER SHOES WITH THE M-SPORT OUTSOLE



JALAS® 3500 WHITE

S1 SRC 



JALAS® 3520 WHITE

S2 SRC  



JALAS® 3438 ARIOSO

SIP SRC  



JALAS® 3448 LIGHT

S3 SRC   

JALAS® SPOC

Sculpted for you. Certified for work.

FEET REMAIN COOL
through polyamide

BOA FIT SYSTEM ON THE SIDE
for comfort and easy closure:
5362

ALL-DAY COMFORT
due to lightweight materials

**EXCELLENT ABRASION
AND SLIP RESISTANCE**
provided through nitrile
rubber outsole

**OPTIMAL IMPACT
DISTRIBUTION**
from EVA midsole

ULTIMATE SHOCK ABSORPTION
with optimized PORON® XRD® insole



ACTIVE PLATFORM

Made of highly durable nitrile rubber.
EVA midsole: Optimal impact
distribution.

- Fitting: Regular
- Oil resistant
- Slip resistance: SRC
- ESD & Antistatic



Inspired by sleek, modern sneakers, the JALAS® SPOC combines the safety and ergonomic comfort of an occupational shoe with a stylish new design. For many years, JALAS® users have praised the durability and ergonomic comfort of our safety shoes. Now we have put the same qualities into lightweight, sporty shoes specially designed for service industry applications. The optimal shock absorption of midsole and insole protects feet and back from injuries and makes the shoes comfortable for long work days.

The leather models are splash resistant and highly durable, while the textile models offer flexibility and enhanced breathability. The new JALAS® 5362 has a sock-like construction which makes the shoe easy to put on. Choose between laces or the L6 Boa® Fit System. All the shoes in JALAS® SPOC (sporty occupational) collection are certified according to EN ISO 20347:2012, ensuring durability and safety.

BOA® FIT SYSTEM



Push to engage



Turn to tighten



Pull up for
quick release

01 Occupational footwear

			
JALAS® 5302 SPOC	JALAS® 5322 SPOC	JALAS® 5362 SPOC NEW	JALAS® 5372 SPOC NEW
01 A E FO SRC	01 A E FO SRC	01 A E FO SRC BOA®	01 A E FO SRC BOA®

02 Occupational footwear

	
JALAS® 5342 SPOC	JALAS® 5352 SPOC
02 A E FO SRC	02 A E FO SRC BOA®

GRAND WALKING

A collection of light, handsome shoes for demanding users. Perfect if you spend a lot of time standing and walking on hard floors. Detachable insole with double shock absorption zones.

TANDEM

A light, comfortable model for demanding users. ventilating detachable insole, adjustable heel strap, washable at 40°C. Especially suitable for the healthcare, retailing, cleaning and restaurant sectors.

GRAM

The thick PU-treated outsole is flexible, shock-absorbing and grips well, even on wet surfaces. the fixed heel strap gives the shoes a secure, ergonomic fit. Upper in washable microfiber. Detachable insole with double shock absorption zones.

GRAND WALKING



JALAS° 5032

02 SRC 

TANDEM



JALAS° 5512

01 SRC FO

GRAM



JALAS° 2902

OB A E SRC FO



JALAS° 2942

OB A E SRC FO



JALAS° 2972

OB A E SRC FO








































JALAS° 2982

OB A E SRC FO

SAFETY FOOTWEAR

Dry environments

Dry to wet environments

Outsole material	Collection	Fit	SB	S1	S1P	S2
			p.217	p.188	p.193	p.199
RPU outsole: JALAS® most comfortable outsoles are made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles.	Zenit p.164	Regular		 3020	  1708 SOA 3008	 3030
	Zenit Evo p.166	Regular		 7100	   7108 SOA 7118 SOA 7128	
	Street p.164	Regular				
TPU outsole: Very breathable. Suitable for clean environments.	Respiro p.168	Regular	Very breathable	   3820R 3800R 3510R		 3700R
Nitrile outsole: Excellent durability. Very good grip on wet and icy surfaces. Heat-resistant up to 300°C. Resistant to most chemicals.	Exalter p.170	Regular		  9500 9520	    9925 SOA 9945 SOA 9538 SOA 9518	
	Flow p.170	Narrow			 9605	
	Drylock p.172	Regular + Wide				
	Heavy Duty p.174	Regular				
	Gran Premio p.176	Wide		 1510	 1518	 1540
	Grip p.178	Regular		  3920A 3100	 3108	   3110 3150 3780
PU outsole: Firm grip and high durability.	Green Line p.180	Narrow/Regular			 6418	
	M-Sport E-Sport S-Sport p.182	Regular		 3400A	   1605 3408A 3438	 3460A
	White p.182	Regular		 3500		 3520
		Regular	 2900			

Cold environments

Heat & Welding

S3 Low cut: p.202		S2 CI S3 CI Mid & high cut + boots: p.212		S2 S3 p.223 p.224	
 1738 SOA 3018 7138 SOA 7148 3045		 1718 SOA 3055		 1728 SOA	
 9965 SOA 9548 SOA 9568 9508 9528 9985 SOA 9615		 1818 3318 3328		 3325 3778	
 WR: Water resistant 3305 3308		 1368 SOA 1278 SOA		 1258	
 ARCTIC GRIP PRO 1338 SOA 1348 Metal free 1268 SOA		 ARCTIC GRIP PRO 1358 SOA 1828		 ARCTIC GRIP PRO 1368 Metal-free 1378 1388	
 1538 1568 1548 3118 1335		 1870 1878 1808 1858		 1898 Welding 1550 3941	
 Business shoes with safety protection 2108		 2118 2128		 Fire collection p.172 1578 FIPA 4768 F2A	
 6468 6458 6428		 6498			
 1618 1615 3468A 3448		 1625 3498			

SAFETY RATING S1

- Protective toe cap
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

SAFETY FOOTWEAR / SAFETY RATING S1

JALAS® 3020 ZENIT

EN ISO 20345:2011, S1 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

BIND SOLE MATERIAL SBS

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

LINING MATERIAL Polyamide, polyester

COLOUR Black, grey, red

FEATURES Oil-resistant outsole, anti-static properties, padded shaft edge in memory foam, ventilating insole, stabilizer, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors



SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION



ZENIT
COLLECTION



jalas®

JALAS® 7100 ZENIT EVO

EN ISO 20345:2011, S1 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

BIND SOLE MATERIAL SBS

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, red, white

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, ergonomically shaped, soft, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION



ZENIT EVO
COLLECTION

jalas®

JALAS® 3820R RESPIRO

EN ISO 20345:2011, S1 SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Stabilizator

SOLE MATERIAL PU midsole, plastic shank, TPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Nubuck leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, red, blue

FEATURES Ultra-high air permeability, three-layer laminate, 'provided by IQTEX based on patented technologies', perforated, oil-resistant outsole, anti-static properties, polstered shaft edge, stabilizator, perforated front section, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments



**VERY
BREATHABLE**

**CLEAN
ENVIRONMENTS**



RESPIRO **jalas®**

JALAS® 3800R RESPIRO

EN ISO 20345:2011, S1 SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Stabilizator

SOLE MATERIAL PU midsole, plastic shank, TPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester, polyamide

COLOUR Black, red, blue

FEATURES Ultra-high air permeability, three-layer laminate, 'provided by IQTEX based on patented technologies', perforated, oil-resistant outsole, anti-static properties, polstered shaft edge, stabilizator, perforated front section, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES High level of protection, good grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments



**VERY
BREATHABLE**

**CLEAN
ENVIRONMENTS**



RESPIRO **jalas®**

JALAS® 3510R RESPIRO

EN ISO 20345:2011, S1 SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Stabilizator

SOLE MATERIAL PU midsole, plastic shank, TPU outsole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR White

FEATURES Ultra-high air permeability, three-layer laminate, 'provided by IQTEX based on patented technologies', perforated, oil-resistant outsole, anti-static properties, polstered shaft edge, stabilizator, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments



**VERY
BREATHABLE**

**CLEAN
ENVIRONMENTS**



RESPIRO **jalas®**

JALAS® 9500 EXALTER

EN ISO 20345:2011, S1 SRC HRO

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, green

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizer, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments

**ERGONOMICALLY SHAPED****EXCELLENT SHOCK ABSORPTION**
EXALTER² **vibram®** **jalas®**
JALAS® 9520 EXALTER

EN ISO 20345:2011, S1 SRC HRO

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, red

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizer, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments

**ERGONOMICALLY SHAPED****EXCELLENT SHOCK ABSORPTION**
EXALTER² **vibram®** **jalas®**
JALAS® 1510 ANTISLIP

EN ISO 20345:2011, S1 SRC HRO

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES Wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors

**WIDE FIT**
GreenPrint™ **jalas®**

JALAS® 3920A CHALLENGER

EN ISO 20345:2011, S1 HRO SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Nubuck leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, adjustable heel strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors


**JALAS® 3100 MONZA GRIP**

EN ISO 20345:2011, S1 HRO SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors


**JALAS® 3400A MONZA SPORT**

EN ISO 20345:2011, S1 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL PU-coated leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, orange

FEATURES Low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, good shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors




JALAS® 3500 WHITE

EN ISO 20345:2011, S1 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR White, black

FEATURES Low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors




SAFETY RATING **S1 P**

- Protective toe cap
- Penetration-resistant outsole
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

SAFETY FOOTWEAR / SAFETY RATING S1 P

JALAS® 1708 ZENIT EASYROLL

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration



SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION



ZENIT
COLLECTION

BOA®

jalas®

JALAS® 3008 ZENIT

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyamide, polyester

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, padded shaft edge in memory foam, ventilating insole, stabilizer, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration



SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION



ZENIT
COLLECTION

jalas®

S1 P

JALAS® 7108 ZENIT EVO

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, red, white

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, Boa® closure system, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**ZENIT EVO**
COLLECTION

BOA®

jalas®**JALAS® 7118 ZENIT EVO EASYROLL**

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, grey, white

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, Boa® closure system, stabilizer, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**ZENIT EVO**
COLLECTION

BOA®

jalas®

S1 P

JALAS® 7128 ZENIT EVO

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, grey, white

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, ergonomically shaped, soft, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**ZENIT EVO**
COLLECTION**jalas®**

JALAS® 9925 EXALTER

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, green

NEW

FEATURES Breathable mesh, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments, warm environments



IN STOCK
FEBRUARY 2020

SOCK-LIKE
CONSTRUCTION

EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****BOA®****jalas®****JALAS® 9945 EXALTER**

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, Merino wool, neo foam, poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, green

NEW

FEATURES Breathable mesh, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments, warm environments



IN STOCK
FEBRUARY 2020

EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****BOA®****jalas®****JALAS® 9538 EXALTER EASYROLL**

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, green

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, ergonomically shaped, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



BOA® FIT SYSTEM

EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****BOA®****jalas®****S1 P**

JALAS® 9518 EXALTER

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizer, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration, dry environments, clean environments



**EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

**EXALTER²****jalas®****JALAS® 9605 FLOW**

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Narrow/Regular

SIZE RANGE (EU) 34-43

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, Cordura®

LINING MATERIAL Polyester

COLOUR Black, turquoise

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizer, ESD, anatomically designed, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration, dry environments, clean environments



**NARROW FIT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

**FLOW****jalas®**

S1 P

JALAS® 1518 ANTISLIP+

EN ISO 20345:2011, S1 P SRC HRO

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 35-50

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration



WIDE FIT

**jalas®**

JALAS® 3108 MONZA GRIP

EN ISO 20345:2011, S1 P HRO SRB

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, textile

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, rear shock absorption zone, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration

**jalas®****JALAS® 6418 BIO**

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Narrow/Regular

SIZE RANGE (EU) 36-47

PLATFORM Green Line

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, green

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice, meets the EU flower environmental criteria

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, metal-free requirements for shoes, environments with risk for outsole penetration

**METAL FREE****green line****jalas®****JALAS® 1605 E-SPORT**

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL PU-coated leather, split leather

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, red

FEATURES Low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, good shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration, dry environments

**jalas®**

JALAS® 3408A MONZA SPORT

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather, textile
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, orange

FEATURES ProNose toe reinforcement, low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, good shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration



mSport **jalas®**

JALAS® 3438 ARIOSO

EN ISO 20345:2011, S1 P SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX1 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather, textile
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black

FEATURES ProNose toe reinforcement, low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, rear shock absorption zone, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, breathable, good shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, environments with risk for outsole penetration



jalas®

SAFETY RATING S2

- Protective toe cap
- Water-repellent upper
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

SAFETY FOOTWEAR / SAFETY RATING S2

JALAS® 3030 ZENIT

EN ISO 20345:2011, S2 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

BIND SOLE MATERIAL SBS

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

LINING MATERIAL Polyamide, polyester

COLOUR Black, grey, red

FEATURES Oil-resistant outsole, anti-static properties, padded shaft edge in memory foam, ventilating insole, stabilizer, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors



**SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**



ZENIT
COLLECTION



jalas®

JALAS® 3700R RESPIRO

EN ISO 20345:2011, S2 SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Stabilizator

SOLE MATERIAL PU midsole, plastic shank, TPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, nubuck leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, red, blue

FEATURES Ultra-high air permeability, three-layer laminate, 'provided by IQTEX based on patented technologies', perforated, oil-resistant outsole, anti-static properties, polstered shaft edge, stabilizer, water repellent, perforated front section, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, very breathable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors, dry environments, clean environments



**VERY
BREATHABLE**

**CLEAN
ENVIRONMENTS**



RESPIRO

jalas®

JALAS® 1540 ROUTE

EN ISO 20345:2011, S2 SRC HRO CI

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, Cordura®

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, blue

FEATURES Wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors

**WIDE FIT****JALAS® 3110 LIGHT GRIP**

EN ISO 20345:2011, S2 HRO SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Split leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors

**JALAS® 3150 TREK**

EN ISO 20345:2011, S2 HRO SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use



JALAS® 3780 FOODS

EN ISO 20345:2011, S2 SRB HRO CI

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyester, polyamide

COLOUR Black

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, harsh environments


**JALAS® 3460A LIGHT SPORT**

EN ISO 20345:2011, S2 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL Split leather, textile

LINING MATERIAL Polyester, polyamide

COLOUR Black, orange

FEATURES Low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, good shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors


**JALAS® 3520 WHITE**

EN ISO 20345:2011, S2 SRC

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyester, polyamide

COLOUR White

FEATURES Oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors




SAFETY RATING S3

- Protective toe cap
- Penetration-resistant outsole
- Water-repellent upper
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

SAFETY FOOTWEAR / SAFETY RATING S3: LOW CUT

JALAS® 1738 ZENIT EASYROLL

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration



**SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

ZENIT
COLLECTION

BOA®

jalas®



JALAS® 3018 ZENIT

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyamide, polyester

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, padded shaft edge in memory foam, ventilating insole, stabilizer, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration



**SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

ZENIT
COLLECTION

reddot design award
winner 2012

jalas®



JALAS® 7138 ZENIT EVO EASYROLL

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, red, white

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, Boa® closure system, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**ZENIT EVO**
COLLECTION

BOA®

jalas®**JALAS® 7148 ZENIT EVO**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Textile

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, dry environments, clean environments



SOFT
LIGHT WEIGHT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**ZENIT EVO**
COLLECTION**jalas®****JALAS® 3045 FORTYFIVE**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Split leather

LINING MATERIAL Polyester, polyamide

COLOUR Black, yellow, white

FEATURES Oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, stabilizer, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration



EXCELLENT
SHOCK
ABSORPTION

**STREET**
COLLECTION**jalas®**

JALAS® 9965 EXALTER

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, poron® XRD®

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, red

NEW

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments



IN STOCK
FEBRUARY 2020

SOCK-LIKE
CONSTRUCTION

EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****BOA®****jalas®****JALAS® 9548 EXALTER EASYROLL**

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, red

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, water repellent, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments



EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****BOA®****jalas®**

S3

JALAS® 9568 EXALTER

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizer, water repellent, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments



EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION

**EXALTER²****jalas®**

JALAS® 9508 EXALTER

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, green

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizator, water repellent, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments



**EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

**EXALTER²****jalas®****JALAS® 9528 EXALTER**

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, grey, red

FEATURES Low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, stabilizator, water repellent, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments



**EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

**EXALTER²****jalas®****JALAS® 9615 FLOW**

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Narrow/Regular

SIZE RANGE (EU) 34-43

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Exalter2

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, Cordura®

LINING MATERIAL Polyester

COLOUR Black, turquoise

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, ventilating insole, extra shoelaces, stabilizator, water repellent, anatomically designed, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration



**NARROW FIT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**

**FLOW****jalas®**

JALAS® 3305 DRYLOCK

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Split leather, Cordura®


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, ventilating insole, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, wet environments

**WATERPROOF****DRY+LOCK****jalas®****JALAS® 3308 DRYLOCK**

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather, Cordura®

PRONOSE MATERIAL PU


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, ventilating insole, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, wet environments, harsh environments

**WATERPROOF****DRY+LOCK****jalas®**

S3

JALAS® 1338 HEAVY DUTY**NEW**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Arctic Grip

SOLE MATERIAL PU midsole, plastic shank, hNBR rubber + Gripper lugs

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, textile

PRONOSE MATERIAL PU

LINING MATERIAL Polyamide

COLOUR Black, blue

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, Boa® closure system, airport friendly, ESD, water repellent, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration, slippery environments, oily and greasy environments, dirty environments, harsh environments

**AVAILABLE MAY 2020**

VIBRAM® ARCTIC GRIP OUTSOLE - EXCELLENT GRIP ON SNOW AND ICE AIRPORT FRIENDLY

**BOA®****jalas®**

JALAS® 1348 HEAVY DUTY

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Arctic Grip

SOLE MATERIAL PU midsole, plastic shank, hNBR rubber + Gripper lugs

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, microfiber

PRONOSE MATERIAL PU


LINING MATERIAL Polyester, polyamide

COLOUR Black, grey

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, metal free, anti-static properties, bellows tongue, polstered shaft edge, ESD, water repellent, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, metal-free requirements for shoes, warm surfaces, environments with risk for outsole penetration, slippery environments, oily and greasy environments, dirty environments, harsh environments

**METAL FREE**

VIBRAM® ARCTIC GRIP OUTSOLE - EXCELLENT GRIP ON SNOW AND ICE



jalas®

**JALAS® 1268 HEAVY DUTY**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Composite

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Balance

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, blue

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, TPU heel support, anti-static properties, bellows tongue, polstered shaft edge, Boa® closure system, water repellent, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, warm surfaces, dirty environments, harsh environments



BOA® **jalas®**

**JALAS® 1538 TERRA**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 35-50

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, harsh environments

**WIDE FIT**

jalas®



JALAS® 1335 BLACK

EN ISO 20345:2011, S3 SRB HRO CI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather

LINING MATERIAL Polyester, polyamide

COLOUR Black

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration

**jalas®****JALAS® 2108 VIP SAFETY****NEW**

EN ISO 20345:2011, S3 SRA HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

SIZE RANGE (EU) 35-48

SOLE MATERIAL Rubber outsole

INSOLE FX2 VIP Safety

INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Leather

COLOUR Black

FEATURES Anti-static properties, ventilating insole, ESD, water repellent leather, specially designed details, shock absorbing

PROPERTIES Good fit, comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, all-year use, environments with risk for outsole penetration, dry environments, clean environments

**jalas®****JALAS® 6468 EKO**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Narrow/Regular

SIZE RANGE (EU) 36-47

PLATFORM Green Line

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber, textile

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyamide

COLOUR Black, grey, green

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice, meets the EU flower environmental criteria

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, environments with risk for outsole penetration

**METAL FREE
GOOD
ENVIRONMENTAL
CHOICE****green line****jalas®**

JALAS® 6458 PRIMA WHITE

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Composite
 FITTING Narrow/Regular
 SIZE RANGE (EU) 36-47
 PLATFORM Green Line
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL Microfiber
 LINING MATERIAL Polyester, polyamide
 COLOUR White, grey

FEATURES Oil-resistant outsole, metal free, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice
 PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, environments with risk for outsole penetration

**METAL FREE**

green line **jalas®**

JALAS® 6428 PRIMA

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Composite
 FITTING Narrow/Regular
 SIZE RANGE (EU) 36-47
 PLATFORM Green Line
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL Full-grain leather
 LINING MATERIAL Polyester, polyamide
 COLOUR Black

FEATURES Oil-resistant outsole, metal free, anti-static properties, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, environments with risk for outsole penetration

**METAL FREE**

green line **jalas®**

S3

JALAS® 1618 S-SPORT

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL Textile, CPU overmolding
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, orange

FEATURES Low weight, anti-static properties, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Good grip, perfect fit, extra comfortable, breathable, excellent shock absorption, extremely light
 PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, dry environments, clean environments

**LIGHT WEIGHT**

mSport **jalas®**

JALAS® 1615 E-SPORT

EN ISO 20345:2011, S3 SRC CI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather, split leather
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, grey, red

FEATURES Low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, good shock absorption, light
 PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration



**ONLY
AVAILABLE IN
CERTAIN
MARKETS**

jalas®

**JALAS® 3468A LIGHT SPORT**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL Split leather, textile
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, orange

FEATURES ProNose toe reinforcement, low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, good shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration



mSport **jalas®**

**JALAS® 3448 LIGHT**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX1 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black

FEATURES ProNose toe reinforcement, low weight, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, rear shock absorption zone, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, good shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, harsh environments



jalas®



JALAS® 1718 ZENIT EASYROLL

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, quick-tie, stabilizer, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration

**SOFT****EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION****ZENIT**
COLLECTION

BOA®

jalas®**JALAS® 3055 FIFTYFIVE**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Split leather

LINING MATERIAL Polyester, polyamide

COLOUR Black, grey, yellow

FEATURES Oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, stabilizer, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration

**EXCELLENT
SHOCK
ABSORPTION****STREET**
COLLECTION**jalas®**

S3

JALAS® 9985 EXALTER**NEW**

EN ISO 20345:2011, S3 SRC HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, poron® XRD®

UPPER MATERIAL Microfiber, textile

LINING MATERIAL Polyester

COLOUR Black, red

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, Boa® closure system, quick-tie, stabilizer, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration, clean environments

**IN STOCK
FEBRUARY 2020****SOFT****EXCELLENT
SHOCK
ABSORPTION****EXALTER²**

BOA®

**jalas®**

JALAS® 1818 DRYLOCK WIDE

EN ISO 20345:2011, S3 SRC CI WR HRO

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather

PRONOSE MATERIAL PU


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, wet environments, harsh environments

**WATERPROOF
WIDE FIT****DRY+LOCK****jalas®****JALAS® 3318 DRYLOCK**

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather, Cordura®

PRONOSE MATERIAL PU


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, quick-tie, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, wet environments, harsh environments

**WATERPROOF****DRY+LOCK****jalas®****JALAS® 3328 DRYLOCK**

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather

PRONOSE MATERIAL PU


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black

FEATURES Waterproof Drylock-membrane, ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, wet environments, harsh environments

**WATERPROOF****DRY+LOCK****jalas®**

JALAS® 1358 HEAVY DUTY **NEW**


EN ISO 20345:2011, S3 HI CI AN HRO SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Composite
 FITTING Regular
 SIZE RANGE (EU) 35-48
 PLATFORM Arctic Grip
 SOLE MATERIAL PU midsole, plastic shank, hNBR rubber + Gripper lugs
 INSOLE FX2 Supreme
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL PU-coated leather, microfiber
 PRONOSE MATERIAL PU
 LINING MATERIAL Technical fleece
 COLOUR Black, grey

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, Boa® closure system, ankle protection, ankle support, airport friendly, pull loops, ESD, water repellent, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, metal-free requirements for shoes, warm surfaces, environments with risk for outsole penetration, slippery environments, dry environments, cold environments, moist environments, oily and greasy environments, dirty environments, harsh environments



VIBRAM® ARCTIC GRIP OUTSOLE - EXCELLENT GRIP ON SNOW AND ICE

BOA® FIT SYSTEM

AIRPORT FRIENDLY

**JALAS® 1278 HEAVY DUTY**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel
 TOECAP MATERIAL Composite
 FITTING Regular
 SIZE RANGE (EU) 35-48
 PLATFORM Balance
 SOLE MATERIAL PU midsole, rubber outsole
 INSOLE FX2 Supreme
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, blue

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, TPU heel support, bellows tongue, padded shaft edge in memory foam, Boa® closure system, ankle support, pull loops, water repellent, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration, oily and greasy environments, dirty environments, harsh environments



BOA® FIT SYSTEM

PROTECTIVE SECTIONS IN UPPER

**JALAS® 1828 JUPITER**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel
 TOECAP MATERIAL Aluminium
 FITTING Wide
 SIZE RANGE (EU) 35-50
 PLATFORM Enduro
 SOLE MATERIAL PU midsole, rubber outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, harsh environments



WIDE FIT



JALAS® 2118 VIP SAFETY **NEW**

EN ISO 20345:2011, S3 SRA HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Steel
 FITTING Narrow/Regular
 SIZE RANGE (EU) 35-48
 SOLE MATERIAL Rubber outsole
 INSOLE FX2 VIP Safety
 INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL Full-grain leather
 LINING MATERIAL Leather
 COLOUR Black

FEATURES Anti-static properties, ventilating insole, water repellent leather, specially designed details, shock absorbing, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Good fit, comfortable, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, all-year use, environments with risk for outsole penetration, dry environments, clean environments

**jalas®****JALAS® 2128 VIP SAFETY** **NEW**

EN ISO 20345:2011, S3 SRA HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Steel
 FITTING Narrow/Regular
 SIZE RANGE (EU) 35-48
 SOLE MATERIAL Rubber outsole
 INSOLE FX2 VIP Safety
 INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL Full-grain leather
 COLOUR Brown

FEATURES Anti-static properties, ventilating insole, ESD, water repellent leather, specially designed details, shock absorbing
 PROPERTIES Good fit, comfortable, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, all-year use, environments with risk for outsole penetration, dry environments, clean environments

**jalas®****JALAS® 6498 NATURE**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Composite
 FITTING Narrow/Regular
 SIZE RANGE (EU) 36-47
 PLATFORM Green Line
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®
 UPPER MATERIAL Microfiber, textile
 PRONOSE MATERIAL PU
 LINING MATERIAL Cambrelle®, polyamide
 COLOUR Black, grey, green

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, bellows tongue, ventilating insole, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice, meets the EU flower environmental criteria
 PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, metal-free requirements for shoes, environments with risk for outsole penetration



METAL FREE
GOOD ENVIRONMENTAL CHOICE

**green line****jalas®**

JALAS® 1625 E-SPORT

EN ISO 20345:2011, S3 SRC HI CI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather, split leather
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, grey, red

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, good shock absorption, light
 PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, environments with risk for outsole penetration



**ONLY
AVAILABLE
IN CERTAIN
MARKETS**

jalas®

**JALAS® 3498 HIGHLIGHT**

EN ISO 20345:2011, S3 SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Regular
 SIZE RANGE (EU) 36-47
 PLATFORM M-Sport
 SOLE MATERIAL Plastic shank, PU outsole
 INSOLE FX2 Classic
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan
 UPPER MATERIAL PU-coated leather, textile
 PRONOSE MATERIAL PU
 LINING MATERIAL Polyester, polyamide
 COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, water repellent, double shock absorption zones
 PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, good shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, harsh environments



mSport **jalas®**



SAFETY RATING **SB**

- Protective toe cap
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

SAFETY FOOTWEAR / SAFETY RATING SB

JALAS® 2900 JACK

EN ISO 20345:2011, SB A E FO SRC

TOECAP MATERIAL Steel

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Gram

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester

COLOUR Black

FEATURES Oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Indoors



jalas®



COLD INSULATED SAFETY FOOTWEAR

SAFETY FOOTWEAR / COLD INSULATION / SAFETY RATING S2

JALAS® 1870 OFFROAD

EN ISO 20345:2011, S2 SRC HRO CI

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather


LINING MATERIAL Technical fleece

COLOUR Black, grey, yellow

FEATURES Wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, harsh environments



**WIDE FIT
ZIPPER**



jalas®

SAFETY FOOTWEAR / COLD INSULATION / SAFETY RATING S3

JALAS® 1728 ZENIT EASYROLL

EN ISO 20345:2011, S3 SRC CI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Winter

INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, split leather


PRONOSE MATERIAL PU

LINING MATERIAL Meida® thermo insulation, polyester fur, aluminium foil

COLOUR Black, grey, red

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, Boa® closure system, quick-tie, stabilizer, pull loops, snow lock, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption
PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, cold environments, harsh environments



**SOFT
EXCELLENT
ERGONOMICS
AND SHOCK
ABSORPTION**



ZENIT
COLLECTION

BOA®

jalas®

JALAS® 3325 DRYLOCK

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Winter

INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather


LINING MATERIAL ThermoCloud - thermal insulation, polyester, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, pull loops, snow lock, zipper, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, wet environments, harsh environments



**WATERPROOF
ZIPPER**



DRY+LOCK

jalas®

JALAS® 3778 DRYLOCK

EN ISO 20345:2011, S3 HRO WR SRB

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Winter

INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather

PRONOSE MATERIAL PU


LINING MATERIAL Polyester fur, Drylock membrane

COLOUR Black, grey

FEATURES Waterproof Drylock-membrane, ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, pull loops, snow lock, zipper, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, cold environments, wet environments, harsh environments



**WATERPROOF
ZIPPER**



DRY+LOCK

jalas®

JALAS® 1368 HEAVY DUTY**NEW**

EN ISO 20345:2011, S3 HI CI AN HRO SRC

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Arctic Grip

SOLE MATERIAL PU midsole, plastic shank, hNBR rubber + Gripper lugs

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather, microfiber

PRONOSE MATERIAL PU


LINING MATERIAL Polyester fur

COLOUR Black, grey

FEATURES ProNose toe reinforcement, heat-resistant upper, heat-resistant outsole, oil-resistant outsole, metal free, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, ankle protection, ankle support, pull loops, snow lock, ESD, water repellent, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, warm, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, warm surfaces, environments with risk for outsole penetration, slippery environments, cold environments, moist environments, oily and greasy environments, dirty environments, harsh environments, environments with explosive risks



**METAL FREE
VIBRAM® ARCTIC
GRIP OUTSOLE -
EXCELLENT GRIP
ON SNOW AND ICE**



vibram®

Xrd extreme impact protection

jalas®

Cold insulated


JALAS® 1808 ICETRACK

EN ISO 20345:2011, S3 SRC CI HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Wide
 SIZE RANGE (EU) 36-48
 PLATFORM Enduro
 SOLE MATERIAL PU midsole, plastic shank, rubber outsole
 INSOLE FX2 Winter
 INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Meida® thermo insulation, polyester fur, aluminium foil
 COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, environments with risk for outsole penetration, cold environments, harsh environments



EXTREMELY WARM
ZIPPER
WIDE FIT



jalas®

JALAS® 1858 POLAR


EN ISO 20345:2011, S3 SRC CI HRO

NAIL PROTECTION MATERIAL Steel
 TOECAP MATERIAL Aluminium
 FITTING Wide
 SIZE RANGE (EU) 39-48
 PLATFORM Enduro
 SOLE MATERIAL PU midsole, rubber outsole
 INSOLE FX2 Pro
 INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Technical fleece
 COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, zipper, water repellent, reflector, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, harsh environments



WIDE FIT
ZIPPER



jalas®


JALAS® 1898 WINTER KING

EN ISO 20345:2011, S3 SRC CI HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
 TOECAP MATERIAL Aluminium
 FITTING Wide
 SIZE RANGE (EU) 35-50
 PLATFORM Enduro
 SOLE MATERIAL PU midsole, plastic shank, rubber outsole
 INSOLE FX2 Winter
 INSOLE MATERIAL Textile, aluminium foil, soft EVA, Merino wool, double shock absorption zones in Poron® XRD™
 UPPER MATERIAL PU-coated leather
 PRONOSE MATERIAL PU
 LINING MATERIAL Meida® thermo insulation, polyester fur, aluminium foil
 COLOUR Black, grey, yellow

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), heat-resistant, withstands welding sparks and grinding splash

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption
 PRIMARY ENVIRONMENTS OF USE Outdoors, warm surfaces, environments with risk for outsole penetration, cold environments, harsh environments



EXTREMELY WARM
WIDE FIT
HEAT AND WELDING



jalas®

Cold insulated

JALAS® 6438 TEMPERA

EN ISO 20345:2011, S3 SRC CI

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Composite

FITTING Narrow/Regular

SIZE RANGE (EU) 36-47

PLATFORM Green Line

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

UPPER MATERIAL PU-coated leather, split leather

PRONOSE MATERIAL PU


LINING MATERIAL Polyester fur

COLOUR Black, yellow

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, environments with risk for outsole penetration, cold environments, harsh environments

**METAL FREE**

green line **jalas®**



HEAT & WELDING PROTECTION

SAFETY FOOTWEAR / HEAT & WELDING PROTECTION / SAFETY RATING S2

JALAS® 1550 LOW

EN ISO 20345:2011, S2 SRC HRO CI

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyester

COLOUR Black

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, warm surfaces



JALAS® 3941 HUNTER

EN ISO 20345:2011, S2 HRO SRB

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyamide

COLOUR Black, yellow

FEATURES ProNose toe reinforcement, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), heat-resistant, withstands welding sparks and grinding splash

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, warm surfaces, harsh environments



ZIPPER



Heat & Welding

JALAS® 1258 HEAVY DUTY

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Composite

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Balance

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, blue

FEATURES ProNose toe reinforcement, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, warm surfaces, environments with risk for outsole penetration, oily and greasy environments, dirty environments, harsh environments


**JALAS® 1948 METATARSAL**

EN ISO 20349:2010, S3 SRC CI M HRO HI I AI Fe WG

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD™

UPPER MATERIAL Full-grain leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide

COLOUR Black, yellow

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, adjustable ankle strap, pull loops, water repellent, flame retardant, specially designed details, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, good fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration, oily and greasy environments, dirty environments, harsh environments

**FOUNDRY & WELDING**
BOOT WITH METATARSAL PROTECTION + KEVLAR STITCHING FOR HEAT PROTECTION
WIDE FIT
**JALAS® 1848 TITAN+**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyester

COLOUR Black

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resist 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilated insole, pull loops, water repellent, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration


KEVLAR STITCHING FOR HEAT PROTECTION + HEAT REFLECTING LINING
WIDE FIT


JALAS® 1848K TITAN+

EN ISO 20345:2011, S3 SRC CI HRO

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 35-50

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyester, Thinsulate™

COLOUR Black

FEATURES ProNose toe reinforcement, Thinsulate™ heat insulation, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, water repellent, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration

**KEVLAR
STITCHING
FOR HEAT
PROTECTION****WIDE FIT****jalas®****JALAS® 1868 KING**

EN ISO 20345:2011, S3 SRC CI HRO HI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 35-50

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Cambrelle®, polyester, Thinsulate™

COLOUR Black

FEATURES ProNose toe reinforcement, Thinsulate™ heat insulation, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, water repellent, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration, harsh environments

**KEVLAR
STITCHING
FOR HEAT
PROTECTION****WIDE FIT****jalas®**

SAFETY FOOTWEAR / HEAT & WELDING PROTECTION / SAFETY RATING FIPA

JALAS® 1578 FIRE RESCUE

EN 15090:2012, FIPA SRC CI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (EU) 38-50

PLATFORM Enduro

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, yellow

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, waterproof, reflector, specially designed details, double shock absorption zones

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE

Outdoors, all-year use, warm surfaces, environments with risk for outsole penetration, moist environments, oily and greasy environments, dirty environments, harsh environments

**WATERPROOF****WIDE FIT****jalas®**

JALAS® 4768 FIRE

EN 15090:2012, F2A SRA CI

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

SIZE RANGE (EU) 39-48

SOLE MATERIAL Solid rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD™

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyamide, Drylock membrane, D30®

COLOUR Black, yellow






























FEATURES D30® impact protection zone, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, waterproof, reflector, specially designed details, double shock absorption zones, heat-resistant, withstands welding sparks and grinding splash

PROPERTIES Highest level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, environments with risk for outsole penetration, wet environments, harsh environments

**WATERPROOF****PROTECTIVE
SECTIONS
IN UPPER****jalas®**

OCCUPATIONAL FOOTWEAR

OCCUPATIONAL FOOTWEAR			Dry environments		Dry to wet environments		Cold environments
Outsole material	Collection	Fit	OB	O1	O2 	Boots & ankle boots p.233	02 CI  
			p.235	p.228	Low shoes p.231		
Rubber & EVA: Outsole made of highly durable nitrile rubber. Optimal impact distribution with EVA midsole.	SPOC p.184	Regular		 5362 BOA	 5372 BOA	 5342	
			 5302	 5322	 5352 BOA		
Nitrile outsole: Excellent durability. Very good grip on wet and icy surfaces. Heat-resistant up to 300°C. Resistant to most chemicals. 	Drylock p.172	Regular			 WR: Water resistant	 3312	
						 9552	
	Gran Premio p.176	Wide				 3322	 1872
						 1822	
PU outsole: Firm grip and high durability.	VIP p.179	Narrow/ Regular			 2102		
					 2112		
					 2142		
	Grand Walking p.185	Regular		 5002	 5042		 5032
				 5012			
	Tandem p.185	Regular		 5512			
	Gram p.185	Regular	 2902	 2942			
			 2972	 2982			
		Regular	 2562				

SAFETY RATING 01

- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

OCCUPATIONAL FOOTWEAR / SAFETY RATING 01

JALAS® 5362 SPOC EASYROLL **NEW**

EN ISO 20347:2012, 01 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Textile

LINING MATERIAL Polyester

FEATURES Breathable mesh, low weight, oil-resistant outsole, anti-static properties, Boa® closure system, ESD, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, slippery environments



BOA®

SPOC
COLLECTION

jalas®

JALAS® 5372 SPOC EASYROLL **NEW**

EN ISO 20347:2012, 01 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, white

FEATURES Breathable mesh, low weight, oil-resistant outsole, anti-static properties, Boa® closure system, ESD, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, slippery environments



BOA®

SPOC
COLLECTION

jalas®

JALAS® 5302 SPOC

EN ISO 20347:2012, 01 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Textile

LINING MATERIAL Polyester

COLOUR Black, white

FEATURES Breathable mesh, low weight, oil-resistant outsole, anti-static properties, ESD, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, slippery environments



SPOC
COLLECTION

jalas®

**JALAS® 5322 SPOC**

EN ISO 20347:2012, 01 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Textile, CPU overmolding

LINING MATERIAL Polyester

COLOUR Red, white

FEATURES Breathable mesh, low weight, oil-resistant outsole, anti-static properties, ventilating insole, ESD, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, extremely light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, slippery environments



SPOC
COLLECTION

jalas®

**JALAS® 5002 MENU BLACK**

EN ISO 20347:2012, 01 SRC

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grand Walking

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyester, polyamide

COLOUR Black

FEATURES Low weight, oil-resistant outsole, anti-static properties, adjustable heel strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, good fit, comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors



GRAND WALKING

jalas®



JALAS® 5042 CARE

EN ISO 20347:2012, 01 SRC

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grand Walking

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester, polyamide

COLOUR Black, silver

FEATURES Low weight, oil-resistant outsole, anti-static properties, adjustable heel strap, adjustable ankle strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



GRAND WALKING

jalas®**JALAS® 5012 MENU WHITE**

EN ISO 20347:2012, 01 SRC

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grand Walking

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester, polyamide

COLOUR White

FEATURES Low weight, oil-resistant outsole, adjustable heel strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, good fit, comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, slippery environments, dry environments



GRAND WALKING

jalas®**JALAS® 5512 JOVIA**

EN ISO 20347:2012, 01 SRC FO

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Tandem

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Soft EVA, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester

COLOUR Black, white

FEATURES Breathable mesh, low weight, oil-resistant outsole, anti-static properties, ventilating insole, adjustable heel strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors

**jalas®**

SAFETY RATING 02

- Water-repellent upper
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

OCCUPATIONAL FOOTWEAR / SAFETY RATING 02

JALAS® 5342 SPOC

EN ISO 20347:2012, 02 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Polyester

COLOUR Black

FEATURES Low weight, oil-resistant outsole, anti-static properties, ESD, water repellent leather, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, all-year use, slippery environments, dry environments, clean environments



SPOC 

JALAS® 5352 SPOC EASYROLL

EN ISO 20347:2012, 02 A E FO SRC

FITTING Regular

SIZE RANGE (EU) 35-48

PLATFORM Active

SOLE MATERIAL EVA, rubber outsole

INSOLE FX2 PRO SpOc insole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Polyester

COLOUR Black

FEATURES Low weight, oil-resistant outsole, anti-static properties, Boa® closure system, ESD, water repellent leather, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES High level of protection, excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, indoors, office environments, all-year use, slippery environments, dry environments, clean environments



BOA **SPOC** 

JALAS® 2102 RICHARD

EN ISO 20347:2012, 02 SRA FO

FITTING Regular

SIZE RANGE (EU) 39-47

PLATFORM Comfort

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Pigskin, textile

COLOUR Black

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments


**JALAS® 2112 RONALD**

EN ISO 20347:2012, 02 SRA FO

FITTING Regular

SIZE RANGE (EU) 39-47

PLATFORM Comfort

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Leather

COLOUR Black

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments


**JALAS® 2142****NEW**

EN ISO 20347:2012, 02 SRA FO

FITTING Regular

SIZE RANGE (EU) 39-47

PLATFORM Comfort

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

UPPER MATERIAL Full-grain leather

LINING MATERIAL Leather

COLOUR Brown

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Good grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments




JALAS® 3312 DRYLOCK

EN ISO 20347:2012, 02 SRB WR HRO FO

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather, Cordura®


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black, grey, red

FEATURES Waterproof Drylock-membrane, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, wet environments

**WATERPROOF****DRY+LOCK****jalas®****JALAS® 9552 COMBAT**

EN ISO 20347:2012, 02 SRC WR HRO FO

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather, textile


LINING MATERIAL Polyester, polyamide, Drylock membrane

COLOUR Black

FEATURES Waterproof Drylock-membrane, low weight, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, waterproof, double shock absorption zones

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, wet environments

**WATERPROOF****LIGHT WEIGHT****DRY+LOCK****jalas®****JALAS® 3322 DRYLOCK**

EN ISO 20347:2012, 02 SRB WR HRO FO

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grip

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Polyester, polyamide, Drylock membrane


COLOUR Black

FEATURES Waterproof Drylock-membrane, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot

shaft, ventilating insole, pull loops, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, wet environments, harsh environments

**WATERPROOF****DRY+LOCK****jalas®**

COLD INSULATED OCCUPATIONAL FOOTWEAR

OCCUPATIONAL FOOTWEAR / SAFETY RATING O2

JALAS® 1872 OFFROAD

EN ISO 20347:2012, O2 SRC HRO CI FO

FITTING Wide

SIZE RANGE (EU) 36-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL PU-coated leather


LINING MATERIAL Technical fleece

COLOUR Black, grey, yellow

FEATURES Wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, harsh environments



WIDE FIT



jalas®



JALAS® 1822 BOOTS

EN ISO 20347:2012, O2 SRC HRO CI FO

FITTING Wide

SIZE RANGE (EU) 37-48

PLATFORM Enduro

SOLE MATERIAL PU midsole, plastic shank, rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL PU-coated leather


LINING MATERIAL Polyester fur

COLOUR Black, grey

FEATURES Wide fit, heat-resistant outsole, oil-resistant outsole, metal free, anti-static properties, padded boot shaft, ventilating insole, pull loops, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption

PRIMARY ENVIRONMENTS OF USE Outdoors, metal-free requirements for shoes, cold environments, harsh environments



WIDE FIT



jalas®



JALAS® 5032 MOVE

EN ISO 20347:2012, O2 SRC

FITTING Regular

SIZE RANGE (EU) 36-47

PLATFORM Grand Walking

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Full-grain leather


LINING MATERIAL Polyester, polyamide

COLOUR Black

FEATURES Low weight, oil-resistant outsole, anti-static properties, zipper, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, warm, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Outdoors



GRAND WALKING

jalas®



SAFETY RATING OB

- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

OCCUPATIONAL FOOTWEAR / SAFETY RATING OB

JALAS® 2902 DANIEL

EN ISO 20347:2012, OB A E SRC FO

FITTING Regular

SIZE RANGE (EU) 34-47

PLATFORM Gram

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester

COLOUR Black, red

FEATURES Low weight, oil-resistant outsole, anti-static properties, adjustable heel strap, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors



jalas®



JALAS® 2942 SARITA

EN ISO 20347:2012, OB A E SRC FO

FITTING Regular

SIZE RANGE (EU) 34-42

PLATFORM Gram

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester

COLOUR Black, silver

FEATURES Ventilating insole, adjustable heel strap, ESD, rear shock absorption zone, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, office environments



à la Sara

jalas®



OB

JALAS® 2972 SUVI

EN ISO 20347:2012, OB A E SRC FO

FITTING Regular

SIZE RANGE (EU) 34-42

PLATFORM Gram

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester

COLOUR Black, pink

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, adjustable ankle strap, ESD, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, office environments, dry environments, clean environments



alaSara

jalas®

**JALAS® 2982 RONJA**

EN ISO 20347:2012, OB A E SRC FO

FITTING Regular

SIZE RANGE (EU) 34-42

PLATFORM Gram

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, double shock absorption zones in Poron® XRD®

UPPER MATERIAL Microfiber

LINING MATERIAL Polyester, polyamide

COLOUR White, black

FEATURES Low weight, oil-resistant outsole, anti-static properties, adjustable heel strap, ESD, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, comfortable, breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, office environments, dry environments, clean environments



alaSara

jalas®

**JALAS® 2562**

EN ISO 20347:2012, OB A E SRC FO

FITTING Regular

SIZE RANGE (EU) 35-48

SOLE MATERIAL PU outsole

UPPER MATERIAL Nubuck leather

LINING MATERIAL Polyamide, neoprene

COLOUR Black

FEATURES Perforated, low weight, oil-resistant outsole, anti-static properties, ESD, conforms with IEC 61340-5-1 (ESD)

PROPERTIES Excellent grip, perfect fit, extra comfortable, very breathable, excellent shock absorption, light

PRIMARY ENVIRONMENTS OF USE Indoors, office environments, dry environments, clean environments



jalas®



OTHER FOOTWEAR

OTHER FOOTWEAR

JALAS® 8020 SHOWER SANDAL

NEW

SIZE RANGE (EU) 35-48 Double sizing

SOLE MATERIAL EVA

UPPER MATERIAL EVA

COLOUR Black, red, white
































FEATURES Low weight, anatomically designed

PROPERTIES Light

PRIMARY ENVIRONMENTS OF USE Indoors




INSOLES

Shape & arch support	Insole	Sizes	Cushioning	General information
FootStopService JALAS® FSS insoles Specific anatomic arch support Extra heel support Control bar for extra stability	8709H High arch 	34-50	Double shock absorption zones with Poron® XRD™.	  
	8710M Medium arch 	34-50	Double shock absorption zones with Poron® XRD™.	  
	8711L Low arch 	34-50	Double shock absorption zones with Poron® XRD™.	  
Anatomic shape Improved support for the arch and heel	8302 FX3 Exalter 	34-50	Double shock absorption zones with Poron® XRD™. Neofoam layer for shock absorption. Soft and hard EVA layers for stability and support.	  
	8244 FX2 Winter 	35-50	Double shock absorption zones with Poron® XRD™.	    Merino wool layer for moisture absorption and comfort. Foil layer for extra insulation.
	8202 FX2 Supreme 	35-50	Double shock absorption zones with Poron® XRD™.	   Merino wool layer for moisture absorption and comfort.
Neutral shape	8012 Spenco 	35-47	EVA	
	8102 FX2 Pro 	34-50	Double shock absorption zones with Poron® XRD™.	  

FSS insoles absorb shocks and reduce stress on your feet

- Shock absorption cushions under the heels transfer the energy from impact efficiently outwards, while the heel cups mould to the shape of your heels.
- Shock-absorbing Poron® XRD® material is used under the heels and the front part of the insoles. It absorbs impacts to the heels and balls of your feet, providing you with comfortable and ergonomic support.
- Slightly higher arch. JALAS® Neutralizer insoles for high arches were redesigned according to the results of approximately 450,000 FootStopService scans. The new higher insoles are manufactured from softer materials that provide better cushioning. The insoles have a shock-absorbing zone under the balls of the feet that reduces the strain common with high arches by following the anatomical shape of the transverse arch.

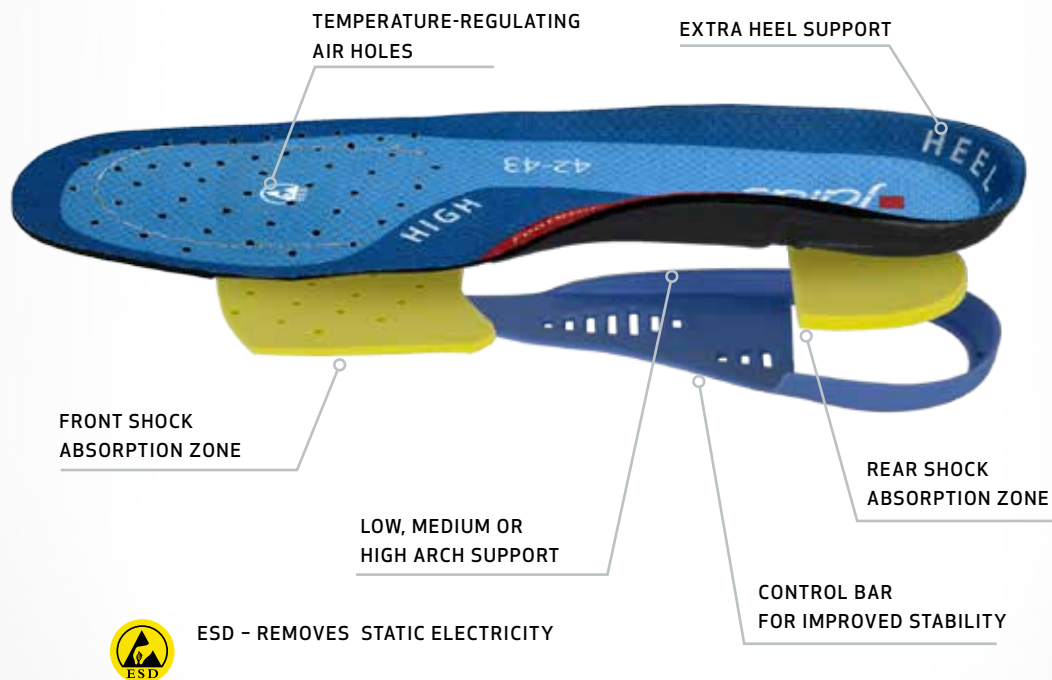

LOW, MEDIUM OR HIGH FOOT ARCH?

JALAS® Neutralizer insoles are approved for use in JALAS® safety shoes and are ESD certified, just as our original insoles. The unique material provides dynamic support – so that the shock absorption of the foot is enhanced and the arch gets extra support. It makes your feet feel better and stay fit and fresh all day.

- Anatomically designed insoles for a low, medium or high arch.
- Double shock absorption zones with Poron® XRD®.
- Marked heel cups and perforated front.
- Approved for use in all JALAS® safety shoes.
- Compliant to IEC 61340-5-1 (ESD).

Read more about JALAS® FSS scanner on page 160



JALAS® 8709H HIGH ARCH SUPPORT

Insole for high arches, textile, soft E.V.A, polyester based electro conductive thread, Control bar in TPU, double shock absorption zones in Poron® XRD®, blue, black, heel/arch support, approved for use in all JALAS® protective shoes, anatomically designed

MATERIAL Textile, soft E.V.A, polyester based electro conductive thread, Control bar in TPU, double shock absorption zones in Poron® XRD®

COLOUR Blue, black

SIZE RANGE (EU) 34-35, 36-37, 38-39, 40-41, 42-43, 44-45, 46-47, 48-50

FEATURES ESD, anatomically designed, ergonomically shaped, heel/arch support, perforated front section, cuttable, high arch, double shock absorption zones, approved for use in all JALAS® protective shoes

PROPERTIES Perfect fit, extra comfortable, breathable, excellent shock absorption



FootStopService
by jalas

jalas®



JALAS® 8710M MEDIUM ARCH SUPPORT

Insole for medium arches, textile, soft E.V.A, polyester based electro conductive thread, Control bar in TPU, double shock absorption zones in Poron® XRD®, green, black, heel/arch support, approved for use in all JALAS® protective shoes, anatomically designed

MATERIAL Textile, soft E.V.A, polyester based electro conductive thread, Control bar in TPU, double shock absorption zones in Poron® XRD®

COLOUR Green, black

SIZE RANGE (EU) 34-35, 36-37, 38-39, 40-41, 42-43, 44-45, 46-47, 48-50

FEATURES ESD, anatomically designed, heel/arch support, perforated front section, cuttable, medium height arch, double shock absorption zones, approved for use in all JALAS® protective shoes

PROPERTIES Perfect fit, extra comfortable, breathable, excellent shock absorption



FootStopService
by jalas

jalas®



JALAS® 8711L LOW ARCH SUPPORT

Insole for low arches, textile, soft E.V.A, polyester based electro conductive thread, Control bar in rigid E.V.A, double shock absorption zones in Poron® XRD®, orange, black, heel/arch support, approved for use in all JALAS® protective shoes, anatomically designed

MATERIAL Textile, soft E.V.A, polyester based electro conductive thread, Control bar in rigid E.V.A, double shock absorption zones in Poron® XRD®

COLOUR Orange, black

SIZE RANGE (EU) 34-35, 36-37, 38-39, 40-41, 42-43, 44-45, 46-47, 48-50

FEATURES ESD, anatomically designed, heel/arch support, perforated front section, cuttable, low arch, double shock absorption zones, approved for use in all JALAS® protective shoes

PROPERTIES Perfect fit, breathable, excellent shock absorption



FootStopService
by jalas

jalas®



JALAS® 8302 FX3 EXALTER INSOLE

Insole, textile, soft E.V.A, rigid E.V.A, polyester based electro conductive thread, neo foam, double shock absorption zones in Poron® XRD®, black, green

MATERIAL Textile, soft E.V.A, rigid E.V.A, polyester based electro conductive thread, neo foam, double shock absorption zones in Poron® XRD®

COLOUR Black, green

SIZE RANGE (EU) 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47

FEATURES ESD, anatomically designed, perforated front section, double shock absorption zones, approved for use in all JALAS® protective shoes

PROPERTIES Extra comfortable, breathable, excellent shock absorption



EXALTER²

jalas®



JALAS® 8244 FX2 WINTER INSOLE

Insole, textile, aluminium foil, soft E.V.A, polyester based electro conductive thread, Merino wool, double shock absorption zones in Poron® XRD®, blue, beige

MATERIAL Textile, aluminium foil, soft E.V.A, polyester based electro conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

COLOUR Blue, beige

SIZE RANGE (EU) 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50

FEATURES ESD, anatomically designed, soft, double shock absorption zones, moisture-wicking, approved for use in all JALAS® protective shoes

PROPERTIES Extra comfortable, extremely warm, breathable, excellent shock absorption



JALAS® 8202 FX2 SUPREME INSOLE

Insole, textile, soft E.V.A, polyester based electro conductive thread, Merino wool, double shock absorption zones in Poron® XRD®, black, grey

MATERIAL Textile, soft E.V.A, polyester based electro conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

COLOUR Black, grey

SIZE RANGE (EU) 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50

FEATURES ESD, ergonomically shaped, soft, perforated front section, double shock absorption zones, moisture-wicking, approved for use in all JALAS® protective shoes

PROPERTIES Extra comfortable, breathable, excellent shock absorption



JALAS® 8012 SPENCO®

Insole, black, blue

COLOUR Black, blue

SIZE RANGE (EU) 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47

FEATURES Washable in 40° C

PROPERTIES Excellent shock absorption, extremely light



JALAS® 8102 FX2 PRO INSOLE

Insole, textile, soft E.V.A, polyester based electro conductive thread, double shock absorption zones in Poron® XRD®, black

MATERIAL Textile, soft E.V.A, polyester based electro conductive thread, double shock absorption zones in Poron® XRD®

COLOUR Black










SIZE RANGE (EU) 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50

FEATURES ESD, ergonomically shaped, perforated front section, double shock absorption zones, approved for use in all JALAS® protective shoes

PROPERTIES Extra comfortable, breathable, excellent shock absorption



SOCKS

	Very breathable	Breathable	Warm	Extremely warm
Lenzing Modal Made from beech wood, Modal is composed of cellulose, just like cotton, and has similar properties. When mixed with other materials Lenzing Modal improves performance – garments become softer and warmer and carry away moisture. Requires 10-20 times less water than cotton plantations.	 8215 8216 Light ankle sock Light ankle sock  8208 Light weight sock	 8210 Medium weight sock	 8212 Heavy weight sock	
Special functionality	 8201 ESD	 8214 Flame retardant	FR (FLAME RETARDANT) This is a viscose fibre in which a flame retardant is encapsulated. Consequently, the retardant cannot be washed or worn away. In other textiles with flameproofing the flame retardant is often added retroactively, which means that it is not permanent. FR has the same properties as the Modal fibre: high moisture absorption, soft and comfortable.	
Bamboo Bamboo socks keep the user's feet cool and dry.	 8203			
Cotton		 8205 4451 4400	Very durable. Size colour coding.	
Wool Wool is soft and insulates the feet against both heat and cold. It can absorb steam without feeling moist. Wool breathes, is flameproof and easy to manage.				 4700

SOCKS

JALAS® 8215 LIGHT ANKLE SOCK

Sock, Lycra®, Lenzing Modal®, nylon, black, breathable, soft

MATERIAL Lycra®, Lenzing Modal®, nylon
COLOUR Black
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 12/60
PAIRS PER HANGTAG 2
DISPLAY Hook with hangtag
FEATURES Washable in 40° C, thin
PROPERTIES Perfect fit, extra comfortable, very breathable



jalas®

JALAS® 8216 LIGHT ANKLE SOCK

Sock, Lycra®, Lenzing Modal®, nylon, white, breathable, soft

MATERIAL Lycra®, Lenzing Modal®, nylon
COLOUR White
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 12/60
PAIRS PER HANGTAG 2
DISPLAY Hook with hangtag
FEATURES Washable in 40° C, thin
PROPERTIES Perfect fit, extra comfortable, very breathable



jalas®

JALAS® 8208 LIGHTWEIGHT SOCK

Sock, Lycra®, Lenzing Modal®, polyamide, black, breathable, soft

MATERIAL Lycra®, Lenzing Modal®, polyamide
COLOUR Black
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Soft, washable in 40° C, moisture-wicking, thin
PROPERTIES Perfect fit, extra comfortable, very breathable



jalas®

JALAS® 8210 MEDIUMWEIGHT SOCK

Sock, Lycra®, Lenzing Modal®, polyamide, black, grey, breathable, half terry cloth, soft

MATERIAL Lycra®, Lenzing Modal®, polyamide
COLOUR Black, grey
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Soft, washable in 40° C, half terry cloth, moisture-wicking
PROPERTIES Perfect fit, extra comfortable, breathable



jalas®

JALAS® 8212 HEAVY WEIGHT SOCK

Sock, Lycra®, Lenzing Modal®, polyamide, black, grey, winter-lined, breathable, full terry cloth, soft

MATERIAL Lycra®, Lenzing Modal®, polyamide
COLOUR Black, grey
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hangtag with euro slot
FEATURES Soft, elastic, washable in 40° C, full terry cloth
PROPERTIES Perfect fit, extra comfortable, warm



jalas®

JALAS® 8201 LIGHT ESD SOCK

Sock, carbon thread, Lycra®, Lenzing Modal®, nylon, polyester, black, grey, breathable, soft

MATERIAL Carbon thread, Lycra®, Lenzing Modal®, nylon, polyester
COLOUR Black, grey
SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES ESD, soft, washable in 40° C, moisture-wicking, thin
PROPERTIES Perfect fit, extra comfortable, very breathable, light



jalas®

JALAS® 8214 FLAME RETARDANT SOCK

Sock, aramid, elastane, Lenzing FR®, polyester, black, flame retardant, withstands welding sparks and grinding splash

MATERIAL Aramid, elastane, Lenzing FR®, polyester
COLOUR Black

SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hangtag with euro slot

FEATURES Flame retardant, soft, washable in 40° C, half terry cloth, moisture-wicking, thin, withstands welding sparks and grinding splash

PROPERTIES Durable, extra comfortable, breathable



jalas®

JALAS® 8203

Sock, bamboo, nylon, polyester, spandex, black, breathable, soft

MATERIAL Bamboo, nylon, polyester, spandex
COLOUR Black

SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Soft, elastic, washable in 40° C, moisture-wicking, thin

PROPERTIES Perfect fit, extra comfortable, very breathable



jalas®

JALAS® 8205

Sock, cotton, Coolmax®, elastane, polyester, black, grey, breathable, half terry cloth, soft

MATERIAL Cotton, Coolmax®, elastane, polyester

COLOUR Black, grey

SIZE RANGE (EU) 36-38, 39-41, 42-43, 44-45, 46-47

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hangtag with euro slot

FEATURES Soft, washable in 40° C, half terry cloth, moisture-wicking

PROPERTIES Very durable, perfect fit, extra comfortable, breathable



jalas®

JALAS® 4451

Sock, cotton, nylon, white, blue, half terry cloth, soft

MATERIAL Cotton, nylon

COLOUR White, blue

SIZE RANGE (EU) 37-39, 40-45

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hangtag with euro slot

FEATURES Washable in 40° C, half terry cloth

PROPERTIES Good fit, comfortable



jalas®

JALAS® 4400

Sock, cotton, nylon, blue, half terry cloth, soft

MATERIAL Cotton, nylon

COLOUR Blue

SIZE RANGE (EU) 37-39, 40-45

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Soft, washable in 40° C, half terry cloth

PROPERTIES Good fit, comfortable, breathable



jalas®

JALAS® 4700

Wool sock, elastane, nylon, wool, grey, winter-lined, soft

MATERIAL Elastane, nylon, wool

COLOUR Grey

SIZE RANGE (EU) 35-37, 38-40, 41-43, 44-47

PAIRS PER PACKAGE/CARTON 6/120

FEATURES Washable in 40° C

PROPERTIES Extremely warm



jalas®

JALAS® 8015 SHOE BRUSH

SIZE RANGE (EU) 1

FEATURES Shoe brush

**JALAS® 8014 SHOE HORN**

Shoe horn, TPE, black

MATERIAL TPE

COLOUR Black

SIZE RANGE (EU) 60

LENGTH 60 cm

**6000 SHOE LACES**

Shoelace, polyester, brown

MATERIAL Polyester

COLOUR Brown

SIZE RANGE (EU) 100, 150

LENGTH 100cm, 150cm

**6006 FLAME RETARDANT SHOE LACES**

Shoelace, Nomex®, black

MATERIAL Nomex®

COLOUR Black

SIZE RANGE (EU) 100, 150

LENGTH 100cm 150cm

**JALAS® 8003 SHOE LACES**

Shoelace, polyester, black

MATERIAL Polyester

COLOUR Black

SIZE RANGE (EU) 90, 100, 120, 160

LENGTH 90 cm 100 cm 120 cm 160 cm



ANTI-SLIP PROTECTION

JALAS® 8018 SLIP PROTECTION

Anti-slip protection, TPE, six studs

MATERIAL TPE

SIZE RANGE (EU) M (36-39), L (38-44), XL (43-48)

PROPERTIES Excellent grip



JALAS® 8023 SLIP PROTECTION

Anti-slip protection, TPE, black

MATERIAL TPE

COLOUR Black

SIZE RANGE (EU) M (36-39), L (38-44), XL (43-48)

FEATURES Ten studs

PROPERTIES Excellent grip



JALAS® 8027 HEEL GRIP

Anti-slip protection, TPU, black, five studs

MATERIAL TPU

COLOUR Black

SIZE RANGE (EU) S (35-38), M (37-40), L (39-45), XL (44-48)

FEATURES Easy to put on and take off, suitable for all shoes and boots

PROPERTIES Perfect fit





















EXPLANATION OF SYMBOLS, PROTECTIVE GLOVES



EN 388:2016
Protective gloves against
mechanical risks.



EN ISO 374-1:2016
Protective gloves against
chemicals and
microorganisms – Part 1:
Terminology and
performance requirements
for chemical risks.



EN 374-5:2016
Protective gloves against
chemicals and
microorganisms – Part 5:
Terminology and
performance requirements
for microorganism risks.



EN 407:2004
Protective gloves against
thermal risks
(heat and/or fire)



EN 511:2006
Protective gloves against
cold



EN 381-7:1999
Hand-held chainsaw
protective gloves



Suitable for contact
with foodstuffs



Suitable for contact
with foodstuffs,
except for fatty foods



Information/UIS



Waterproof
membrane



Water repellent



Windproof



Breathable



Cut protection



Warm lining



ESD



Latex



Short model



For
touchscreen

EXPLANATION OF SYMBOLS, PROTECTIVE FOOTWEAR



Aluminium
toecap



Steel
toecap



Composite
toecap



Nail protection
in steel



Nail protection in
plasma-treated
composite (PTC) textile



Winter model



Waterproof



Water repellent



Oil-resistant
outsole



Heat-resistant
outsole



Wide fit



Ergothan Shock
Absorption System



Shock absorbing



ProNose toe
reinforcement



Heat-resistant
upper



Zipper



Stabilizer



Anti-static
properties



ESD

GLOVE SIZES: COLOUR CODING

The inclusion of this colour coding on the glove label, on the packaging or on the edging makes it easier for you to find your size quickly. Please note: Brands other than TEGERA® may have different colour coding.

4 3X-SMALL	5 XX-SMALL	6 X-SMALL	7 SMALL	8 MEDIUM	9 LARGE
10 X-LARGE	11 XX-LARGE	12 3X-LARGE	13 4X-LARGE	14 5X-LARGE	15 6X-LARGE

FOOTWEAR SIZE GUIDE

It's very important to choose the right size for your safety footwear. A shoe that is too tight or too loose will not only make your working day uncomfortable, it can also lead to blisters and other injuries, and as a result a risk that you will choose to wear other less protective shoes.

Below is a size guide that converts sizes based on the shoe size systems used in different regions. This table is intended as a starting point only. It is of course always best to try on the shoes before you make your final decision. The rigidity of the protective toe cap, for example, means you ought to allow 5–8 mm of extra room for natural movement when walking, so you may need a size bigger than you do for your casual shoes. Don't forget to count in things like extra warm, thick socks and insoles as well.

JALAS® STANDARD SIZING	36	37	38	39	40	41	42	43	44	45	46	47
Millimeter	242	249	256	262	269	276	282	289	296	302	309	316
UK	3	4	5	6	6½	7	8	9	10	10½	11	12
US Male	4	5	5½	6½	7½	8	9	9½	10½	11	12	13
US Female	5	6	6½	7½	8½	9	10	10½	11½	12	13	14

	 Guide to handwear and footwear symbols on backside of cover flap	
4	Protecting hands and feet: An introduction to Ejendals	
12	Hand protection: <ul style="list-style-type: none">• General information• Glove collections	Hand protection
32	Mechanical protection: Precision work	
56	Mechanical protection: Allround work	
73	Mechanical protection: Heavy duty	
78	Cut protection	
98	Thermal protection: Cold insulated	
115	Thermal protection: Heat & Welding	
122	Special protection (ESD, vibration, impact, wrist support, chainsaw, uniform)	
132	Chemical protection	
156	Foot protection: <ul style="list-style-type: none">• General information• Footwear collections	Foot protection
186	Safety footwear: General purpose	
218	Safety footwear: Cold insulated	
223	Safety footwear: Heat & Welding	
227	Occupational footwear	
238	Insoles, socks, accessories	
256	Product index	

